



**Springville Dam on Cattaraugus Creek**

# Introduction

---

**T**he West Valley Demonstration Project (WVDP) site is located about 50 kilometers (30 mi) south of Buffalo, New York (Fig. 1-1). The Project occupies about 89 hectares (220 acres) within the 1,354-hectare (3,345-acre) Western New York Nuclear Service Center (WNYNSC). The Project site includes a security-fenced area of about 63 hectares (156 acres) that contains the plant facilities.

Activities at the West Valley Demonstration Project are directed towards decontaminating and decommissioning the Western New York Nuclear Service Center. This report on the environmental monitoring program at the WVDP provides information about the radioactive and chemical constituents on and around the WNYNSC and the effect, if any, of Project activities on the environment.

The geography, economy, climate, biology, and geology of the region are principal factors in assessing possible effects of site activities on the surrounding population and environment and are an integral consideration in the design and structure of the environmental monitoring program.

---

## *Location*

The WVDP is located on New York State's western plateau at an average elevation of 400 meters (1,300 ft). The communities of West Valley, Riceville, Ashford Hollow, and the village of Springville are located within 8 kilometers (5 mi) of the plant. Several roads and a railway pass through the WNYNSC, but neither hunting, fishing, public access to the site, nor human habitation on the WNYNSC are permitted.

## *Economy*

The land immediately adjacent to the WNYNSC is used primarily for agriculture and arboriculture. Cattaraugus Creek is used locally for swimming, canoeing, and fishing. Although limited irrigation water for nearby golf course greens and tree farms is taken from Cattaraugus Creek, no public water supply is drawn from the creek downstream of the WNYNSC.

## *Climate*

Although there are recorded extremes of 37°C (98.6°F) and -42°C (-43.6°F) in the region, the Western New York climate is moderate, with an average annual temperature of 7.2°C (45.0°F). Rainfall is relatively high, averaging about 104 centimeters (41 in.) per year, although the 33 inches of precipitation in 1991 marked a relatively dry year. Precipitation is evenly distributed throughout the year and is markedly influenced by Lake Erie to the west and, to a lesser extent, by Lake Ontario to the north. Regional winds were predominantly from the west and south at about 4 m/sec (9 mph) during 1991.

## *Biology*

The Western New York Nuclear Service Center lies within the northern deciduous forest biome, and the diversity of its vegetation is typical of the region. Equally divided between forest and open land, the site provides a habitat especially attractive to white-tailed deer and various indigenous birds, reptiles, and small mammals. No endangered species on the federal endangered species list are known to be present on the WNYNSC.

## *Geology and Groundwater Hydrology*

The site is underlain by five geologic units with varying degrees of permeability. The glacial deposits occupy an older valley that is cut into the sedimentary rocks under-

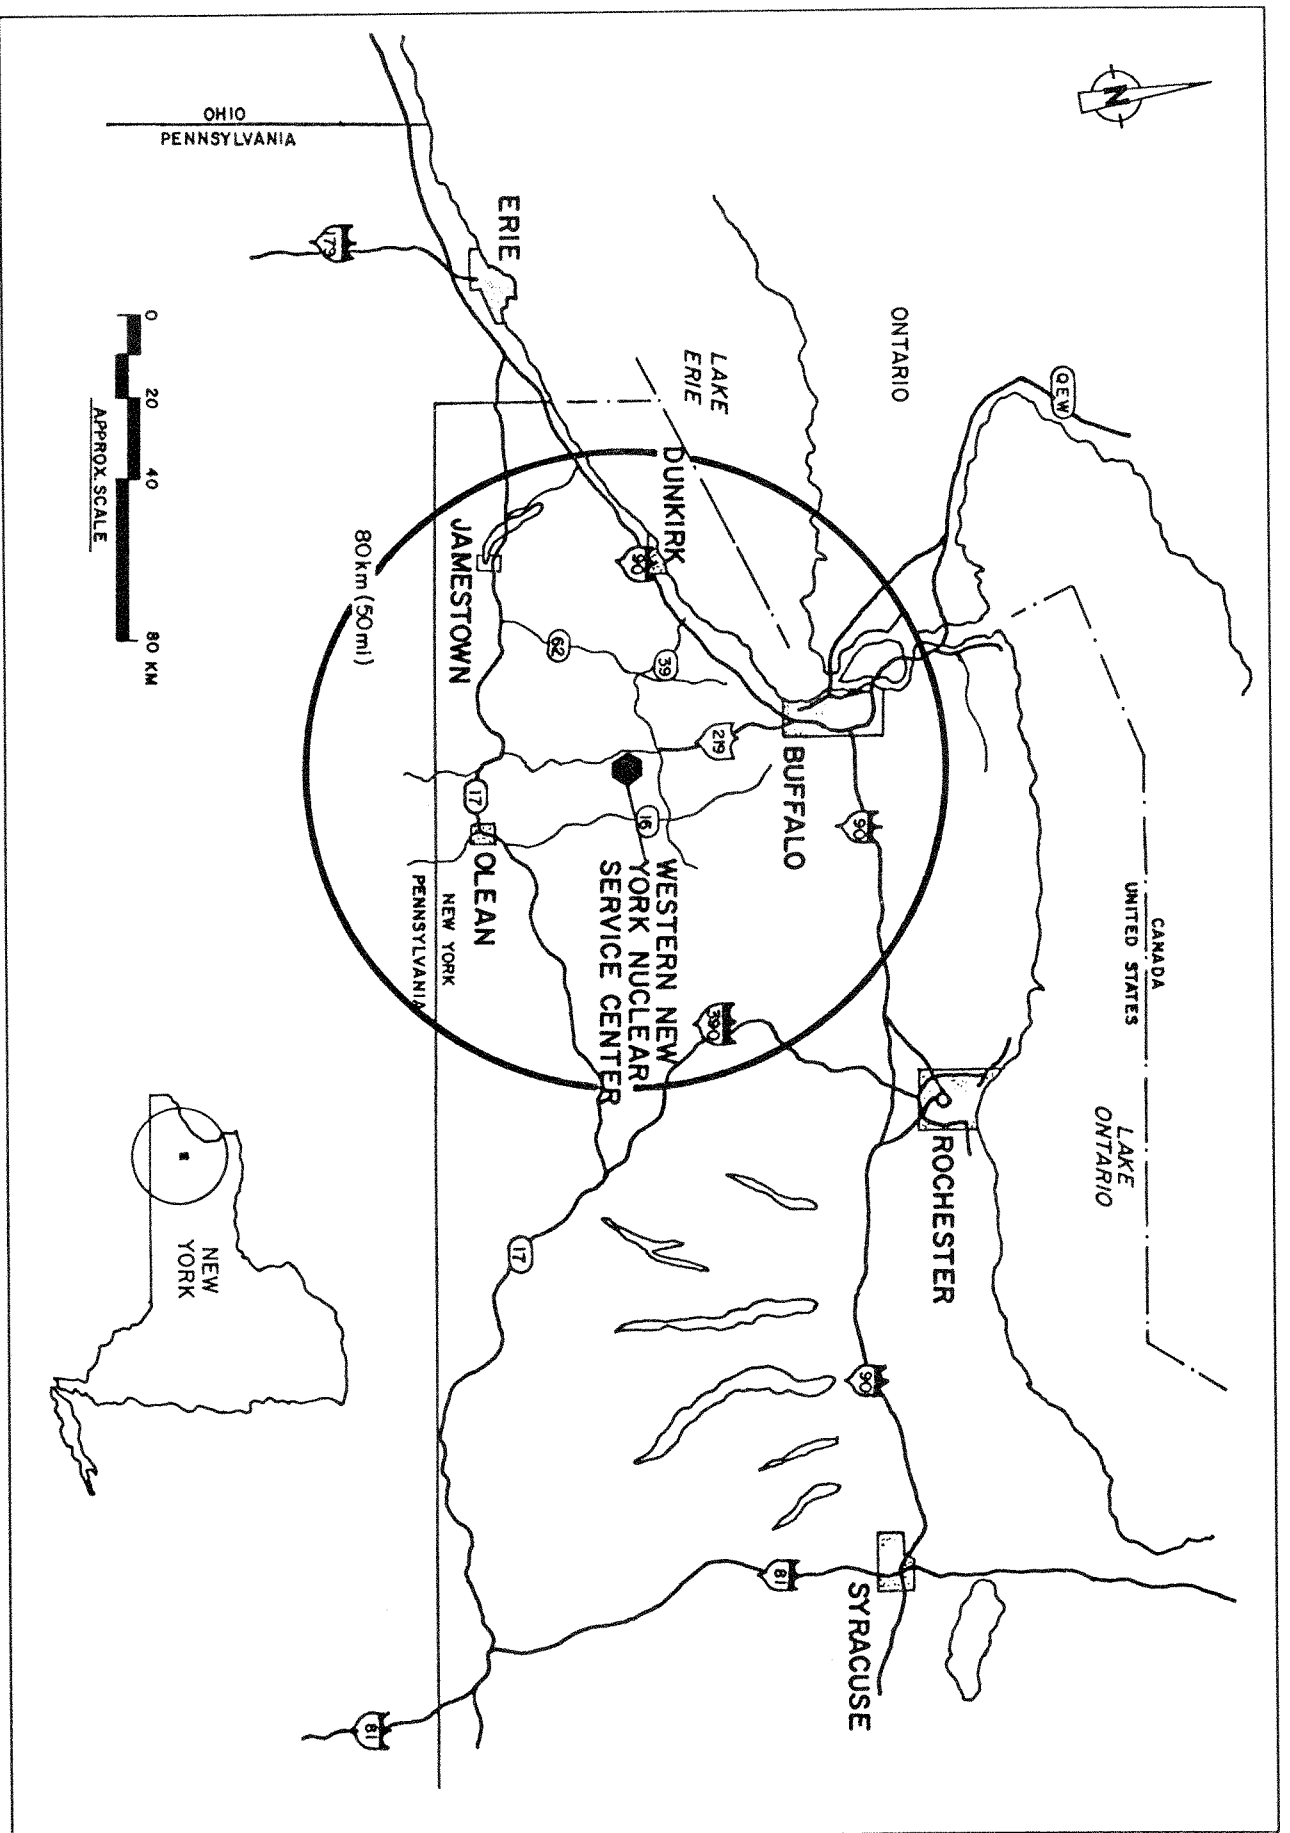


Figure 1-1. Location of the Western New York Nuclear Service Center

lying the entire region. These rocks are exposed in the upper drainage channels on the hillsides.

The soil is mainly silty till consisting of unconsolidated rock fragments, pebbles, sand, and clays. The uppermost till unit is the Lavery, a very dense, compact, gray, silty clay. Below the Lavery till is a more granular zone, the lacustrine unit, which is made up of silts, sands, and, in some places, gravels that overlie a layered clay. The lacustrine unit, in turn, is underlain by an older glacial till, the Kent till, which is quite similar to the Lavery.

There are two aquifers in the site area but neither is considered highly permeable. The topmost aquifer is a transient water table aquifer in the upper 6 meters (20 ft) of weathered Lavery till and alluvial gravels concentrated near the western edge of the site. High ground to the west of the WVDP and Buttermilk Creek valley to the east each intersect this aquifer, precluding off-site migration of groundwater. Several shallow, isolated, water-transmitting strata also occur at various other locations within the site boundary but do not appear to be continuous enough to provide avenues for the movement of groundwater from on-site to off-site areas.

The uppermost bedrock is another aquifer consisting of decomposed shale and rubble that ranges in depth from 2 meters (6 ft) underground on the hillsides to 170 meters (560 ft) deep just east of the Project's fenced area. The groundwater flow patterns are related to the recharge and downgradient movement for the two aquifers. Groundwater in the surficial unit tends to move east or northeast, away from Rock Springs Road. Most of this groundwater empties into Frank's Creek. Groundwater from the lower aquifer tends to move east toward the lowest point of the valley, about 300-350 meters west of Buttermilk Creek, and may emerge to flow north-northwest as surface water. All surface drainage from the WNYNSC is to Buttermilk Creek, which flows into Cattaraugus Creek and ultimately into Lake Erie.

## **Environmental Monitoring Program**

**T**he environmental monitoring program for the West Valley Demonstration Project began in February 1982. The program has been developed to detect any changes in the environment resulting from Project activities and to assess the effect of any such changes on the human population and the environment surrounding the site.

The monitoring network and sample collection schedule have been structured to accommodate specific biological and physical characteristics of the area. Among the several factors considered in designing the environmental monitoring program were the kinds of wastes and other byproducts produced by the processing of high-level waste; possible routes that radiological and non-radiological contaminants could follow into the environment; geologic, hydrologic, and meteorological site conditions; quality assurance standards for monitoring and sampling procedures and analyses; and the limits and standards set by federal and state governments and agencies. As new processes and systems become part of the program, additional monitoring points are selected for sampling.

### ***Monitoring and Sampling***

**T**he environmental monitoring program consists of on-site effluent monitoring and on-site and off-site environmental surveillance in which samples are measured for both radiological and non-radiological components. It includes both the continuous recording of data and the collecting of soil, sediment, water, air, and other samples at various times.

Monitoring and sampling of environmental media provide two ways of assessing the effects of on-site radioactive waste processing. Monitoring is a continuous process that allows rapid detection of any potential effects on the environment from site activities. Sampling is slower than monitoring because it must be followed by laboratory analysis of the collected material, but it allows smaller quantities of radioactivity to be detected through the analysis.

### ***Information in this Report***

Individual chapters in this report include information on compliance with regulations, general information about the monitoring program and significant activities in 1991, summaries of the results of radiological and non-radiological monitoring, and calculations of doses to the population. Where possible, graphs and tables are included to illustrate important trends and concepts. The bulk of the data, however, is furnished in the appendices following the text.

**Appendix A** summarizes the 1991 environmental monitoring schedule at both on-site and off-site locations. Samples are designated by a coded abbreviation indicating sample type and location. (A complete listing

## Introduction

of the codes is found in the index to *Appendix A*.) *Appendix A* lists the kinds of samples taken, the frequency of collection, the parameters analyzed, and the location of the sample points.

*Appendix B* provides a partial list of the radiation protection standards set by the Department of Energy. It also lists federal and state regulations that affect the WVDP and regulatory permits held by the site.

*Appendix C* summarizes analytical data from air, water, sediment, and biological samples (meat, milk, food crops, and fish) as well as direct radiation measurements and meteorological monitoring.

*Appendix D* provides data from the comparison of identically prepared samples (crosscheck analyses) by both the WVDP and independent laboratories. Radiological concentrations in crosscheck samples of air, water, soil,

and vegetation are reported here as well as chemical concentrations from water crosscheck samples.

*Appendix E* summarizes the data collected from groundwater monitoring. Tables and graphs report concentrations at various locations for parameters such as gross alpha and beta, tritium, cesium, and dissolved metals.

## Exposure Pathways Monitored at the West Valley Demonstration Project

The major pathways for potential movement of radionuclides away from the site are by surface water drainage and airborne transport. For this reason the environmental monitoring program emphasizes the collection of air and surface water samples. Samples are collected on-site at locations from which small amounts of radioactivity are normally released or might possibly be released. Such locations include plant ventilation stacks as well as various water effluent points and surface water drainage locations. Samples of air, water, soils, and biota from the environment surrounding the site indicate any radioactivity that might reach the public from site releases.

### Water and Sediment Pathways

Effluent water is collected regularly or, in the case of lagoon 3, when the lagoon water is released, and is analyzed for various parameters, including gross alpha and gross beta, tritium, pH, conductivity, strontium-90, and gamma isotopes. Additional analyses of composite samples determine metals content, biochemical oxygen demand, organic chemicals, and specific isotopic radioactivity.

On-site groundwater and surface water samples are collected regularly and analyzed, at a minimum, for gross alpha and beta, tritium, and pH. Selected samples are scheduled for analysis for conductivity, chlorides, phenols, heavy metals, volatile organic compounds, and other parameters. Potable water on the site is analyzed monthly for radioactivity and annually for chemical constituents. Residential drinking water wells located near the site are sampled annually and analyzed for gross alpha and beta, tritium, gamma isotopes, pH, and conductivity.

Off-site surface waters, primarily from Cattaraugus Creek and Buttermilk Creek, are sampled both upstream

### Permits and Regulations

*Data gathering, analysis, and reporting to meet stringent federal and state requirements and standards are an integral part of the monitoring program. The current program meets the requirements of DOE Orders 5400.1, 5400.5, and DOE Regulatory Guide DOE/EH-0173T.*

*The West Valley Demonstration Project also participates in the State Pollutant Discharge Elimination System (SPDES) as required by the New York State Department of Environmental Conservation (NYSDEC), which regulates discharges of liquid effluents containing nonradiological pollutants. The SPDES permit identifies the outfalls where liquid effluents are released to site drainage and specifies the sampling and analytical requirements for each outfall.*

*In addition, the site operates under state-issued air discharge permits for nonradiological plant effluents. Radiological air discharges must also comply with the National Emissions Standards for Hazardous Air Pollutants (NESHAPs).*

For more information see the ENVIRONMENTAL COMPLIANCE SUMMARY: CALENDAR YEAR 1991. Permits are listed in Appendix B.

of the Project for background radioactivity and downstream to measure possible Project contributions. Sediments deposited downstream of the facility are collected semiannually and analyzed for gross alpha, gross beta, and specific radionuclides. (See *Appendix C-1* for water and sediment data summaries).

### ***Air Pathways***

**E**ffluent air emissions on-site are continuously monitored for alpha and beta activity with remote alarms that indicate any unusual rise in radioactivity. Air particulate filters, which are retrieved and analyzed weekly for gross radioactivity, are also composited quarterly and analyzed for strontium-90, isotopic gamma, and specific alpha-emitting nuclides.

Iodine-129 and tritium also are measured in effluent ventilation air. At two locations silica gel-filled columns are used to extract water vapor that is then distilled from the desiccant and analyzed for tritium. Four samplers contain activated charcoal adsorbent that is analyzed for radioiodine. The silica gel columns are analyzed weekly; the charcoal is collected weekly and composited for quarterly analysis.

Off-site sampling locations include those considered most representative of background conditions and those most likely to be downwind of airborne releases. Among the criteria used to position off-site air samplers are prevailing wind direction, land usage, and population centers.

Air is continuously sampled at nine locations. Background samplers are located in Great Valley and Dunkirk, New York. Nearby community samplers are in Springville and West Valley, New York. Five samplers are located on the perimeter of the Western New York Nuclear Service Center. These samples are analyzed for parameters similar to the effluent air samples. (See *Appendix C-2* for air monitoring data summaries.)

### ***Atmospheric Fallout***

**A**n important contributor to environmental radioactivity is atmospheric fallout. Sources of fallout materials include earlier atmospheric testing of atomic explosives and residual radioactivity from the Chernobyl nuclear power plant accident. Four site perimeter locations currently are sampled for fallout using pot-type samplers that are collected every month. An on-site fallout pot sampler was added to the program

in 1990. Long-term fallout is determined by analyzing soil collected annually at each of the nine perimeter and off-site air samplers. (See *Appendix C-2* for fallout data summaries and *Appendix C-1* for soil data summaries.)

### ***Food Pathways***

**A**nother potentially significant pathway is through domesticated farm animals and produce raised near the WVDP and through game animals and fish that include the WVDP in their range. Appropriate animal and fish samples are gathered and analyzed for radionuclide content in order to reveal any long-term trends. Fish are collected at several locations along Cattaraugus Creek and its tributaries at various distances downstream from the WVDP. Beef, milk, hay, and produce are collected at nearby farms and at selected locations well away from any possible WVDP influence. (See *Appendix C-3* for biological data summaries.)

### ***Direct Radiation Monitoring***

**D**irect penetrating radiation is continuously monitored using thermoluminescent dosimeters (TLDs) located on- and off-site. Monitoring points within the site are placed at waste management units and the inner security fence. Other monitoring stations are situated around the site perimeter and access road and at background locations remote from the WVDP. Forty-one monitoring points were used in 1991. The TLDs are retrieved quarterly and analyzed on-site to obtain the integrated gamma exposure. (See *Appendix C-4* for direct radiation data summaries.)

## **Meteorological Monitoring**

**M**eteorological data are continuously gathered and recorded on-site. Wind speed and direction, barometric changes, temperature, and rainfall are all measured. Such data are valuable in evaluating long-term trends and in developing dispersion models. In the event of an emergency immediate access to the most recent data is indispensable for predicting the path and concentration of any materials that become airborne. (See *Appendix C-6* for meteorological data summaries.)

## **Quality Assurance and Control**

**T**he work performed by and through the on-site environmental laboratory is regularly reviewed by several agencies for accuracy and compliance with applicable regulations. Audits of the laboratory routinely focus on proper record keeping and reporting, timely calibration of equipment, training of personnel, adherence to accepted procedures, and general laboratory safety.

In 1991 the Department of Energy's Office of Environmental Audit reviewed the environmental monitoring program reported in this annual site report. No major deficiencies were identified. (See the *Environmental Compliance Summary: Calendar Year 1991*, for a summary of this audit.)

The Environmental Laboratory also participates in several quality assurance crosscheck programs administered by federal or state agencies. Outside laboratories contracted to perform analyses for the WVDP also are regularly subjected to performance audits. (See *Appendix D* for a summary of crosscheck performance.)

Environmental monitoring management continued to strengthen its formal self-assessment program, developing new strategies and procedures for ensuring high data quality despite more restrictive regulations and a burgeoning sample load. Experienced senior scientists and specialists in varying disciplines follow an annual schedule of quarterly internal appraisals, produce a formal report with recommended corrective actions, and track the planned actions for their implementation. These internal reports are made available to external auditing agencies to provide a history of the monitoring program development and direction.