
INTRODUCTION

History of the West Valley Demonstration Project

In the early 1950s interest in promoting peaceful uses of atomic energy led to the passage of an amendment to the Atomic Energy Act that allowed the Atomic Energy Commission to encourage commercialization of nuclear fuel reprocessing as a way of developing a civilian nuclear industry. The Atomic Energy Commission made its technology available to private industry and invited proposals for the design, construction, and operation of reprocessing plants.

In 1961 the New York Office of Atomic Development acquired 1,335 hectares (3,330 acres) near West Valley, New York and established the Western New York Nuclear Service Center (WNYNSC). Davison Chemical Co. together with the New York State Atomic Research and Development Authority, which later became the New York State Energy Research and Development Authority (NYSERDA), undertook construction and operation of a nuclear fuel reprocessing plant under a co-license issued by the Atomic Energy Commission. Nuclear Fuel Services, Inc. (NFS) was formed by Davison

Chemical Co. to operate the plant as a commercial facility. NFS leased the property at the Western New York Nuclear Service Center and in 1966 began operations to recycle fuel from both commercial and federally owned reactors.

In 1972, while the plant was closed for modifications and expansion, federal and state safety regulations, which were more rigorous than those previously in existence, were imposed. Most of the changes concerned the disposal of high-level radioactive liquid waste and the prevention of earthquake damage to the facilities. NFS decided that compliance with the new regulations was not economically feasible, and in 1976 NFS notified NYSERDA that it would not continue in the fuel reprocessing business.

Following this decision, the reprocessing plant was shut down. Under the original agreement between NFS and New York State, the state was ultimately responsible for both the radioactive wastes and the facility. Numerous studies followed the closing, leading eventually to the passage of Public Law 96-368, the West Valley Demonstration Project Act, which authorized the Department of Energy to demonstrate a method for solidifying the 2.5 million liters (660,000 gal) of liquid high-level waste that

remained at the West Valley site. Congress anticipated that the technologies developed at West Valley would be used at other facilities throughout the United States.

West Valley Nuclear Services Co., Inc. (WVNS), a subsidiary of Westinghouse Electric Corporation, was chosen by the Department of Energy to be the management and operations contractor for the West Valley Demonstration Project. The WVDP Act specifically states that the facilities and waste on-site shall be made available (by the state of New York) without the transfer of title and for such a period as may be required for the completion of the Project.

The purpose of the West Valley Demonstration Project (WVDP) is to solidify the high-level radioactive waste left at the site from the original nuclear fuel reprocessing activities, develop suitable containers for holding and transporting the solidified waste, arrange transportation of the solidified waste to a federal repository, dispose of any Project low-level and transuranic waste resulting from the solidification of high-level waste, and decontaminate and decommission the Project facilities.

The high-level waste was contained in underground storage tanks and had settled into two layers, a liquid supernatant and a precipitate sludge. WVNS, as prime contractor to the DOE, secured environmental approval and constructed various subsystems that made possible the successful start-up in May 1988 of the integrated radwaste treatment system (IRTS). The system stripped radioactivity from the liquid supernatant, allowing the major portion of the liquid to be treated as low-level waste. Treatment of the supernatant liquid from the high-level waste tanks through the IRTS was completed in 1990.

The next step in the process, washing the remaining sludge with water to remove soluble constituents, began in late 1991 and has contin-

ued through 1993. (See *Chapter 1, Environmental Monitoring Program Information* for a more detailed description.) The final step will be vitrification of the remaining high-level waste residues.

This annual environmental monitoring report is published to inform the public about environmental monitoring conditions at the WVDP. The report presents a summary of the environmental monitoring data gathered during the year in order to characterize the performance of the WVDP's environmental management, confirm compliance with standards and regulations, and highlight significant programs.

The geography, economy, climate, ecology, and geology of the region are principal factors in assessing possible effects of site activities on the surrounding population and environment and are an integral consideration in the design and structure of the environmental monitoring program.

Location

The West Valley Demonstration Project site is located about 50 kilometers (30 mi) south of Buffalo, New York (Fig. 1-1). The WVDP site facilities occupy a fenced area of about 80 hectares (200 acres) within the 1,335-hectare (3,330-acre) Western New York Nuclear Service Center. This security-fenced area is referred to as the Project premises, or the restricted area.

The WVDP is located on New York State's Allegheny plateau at an average elevation of 400 meters (1,300 ft). The communities of West Valley, Riceville, Ashford Hollow, and the village of Springville are located within 8 kilometers (5 mi) of the plant. Several roads and a railway pass through the WNYNSC, but the public does not have access to the WNYNSC. Hunting, fishing, and human habitation on the WNYNSC are prohibited.

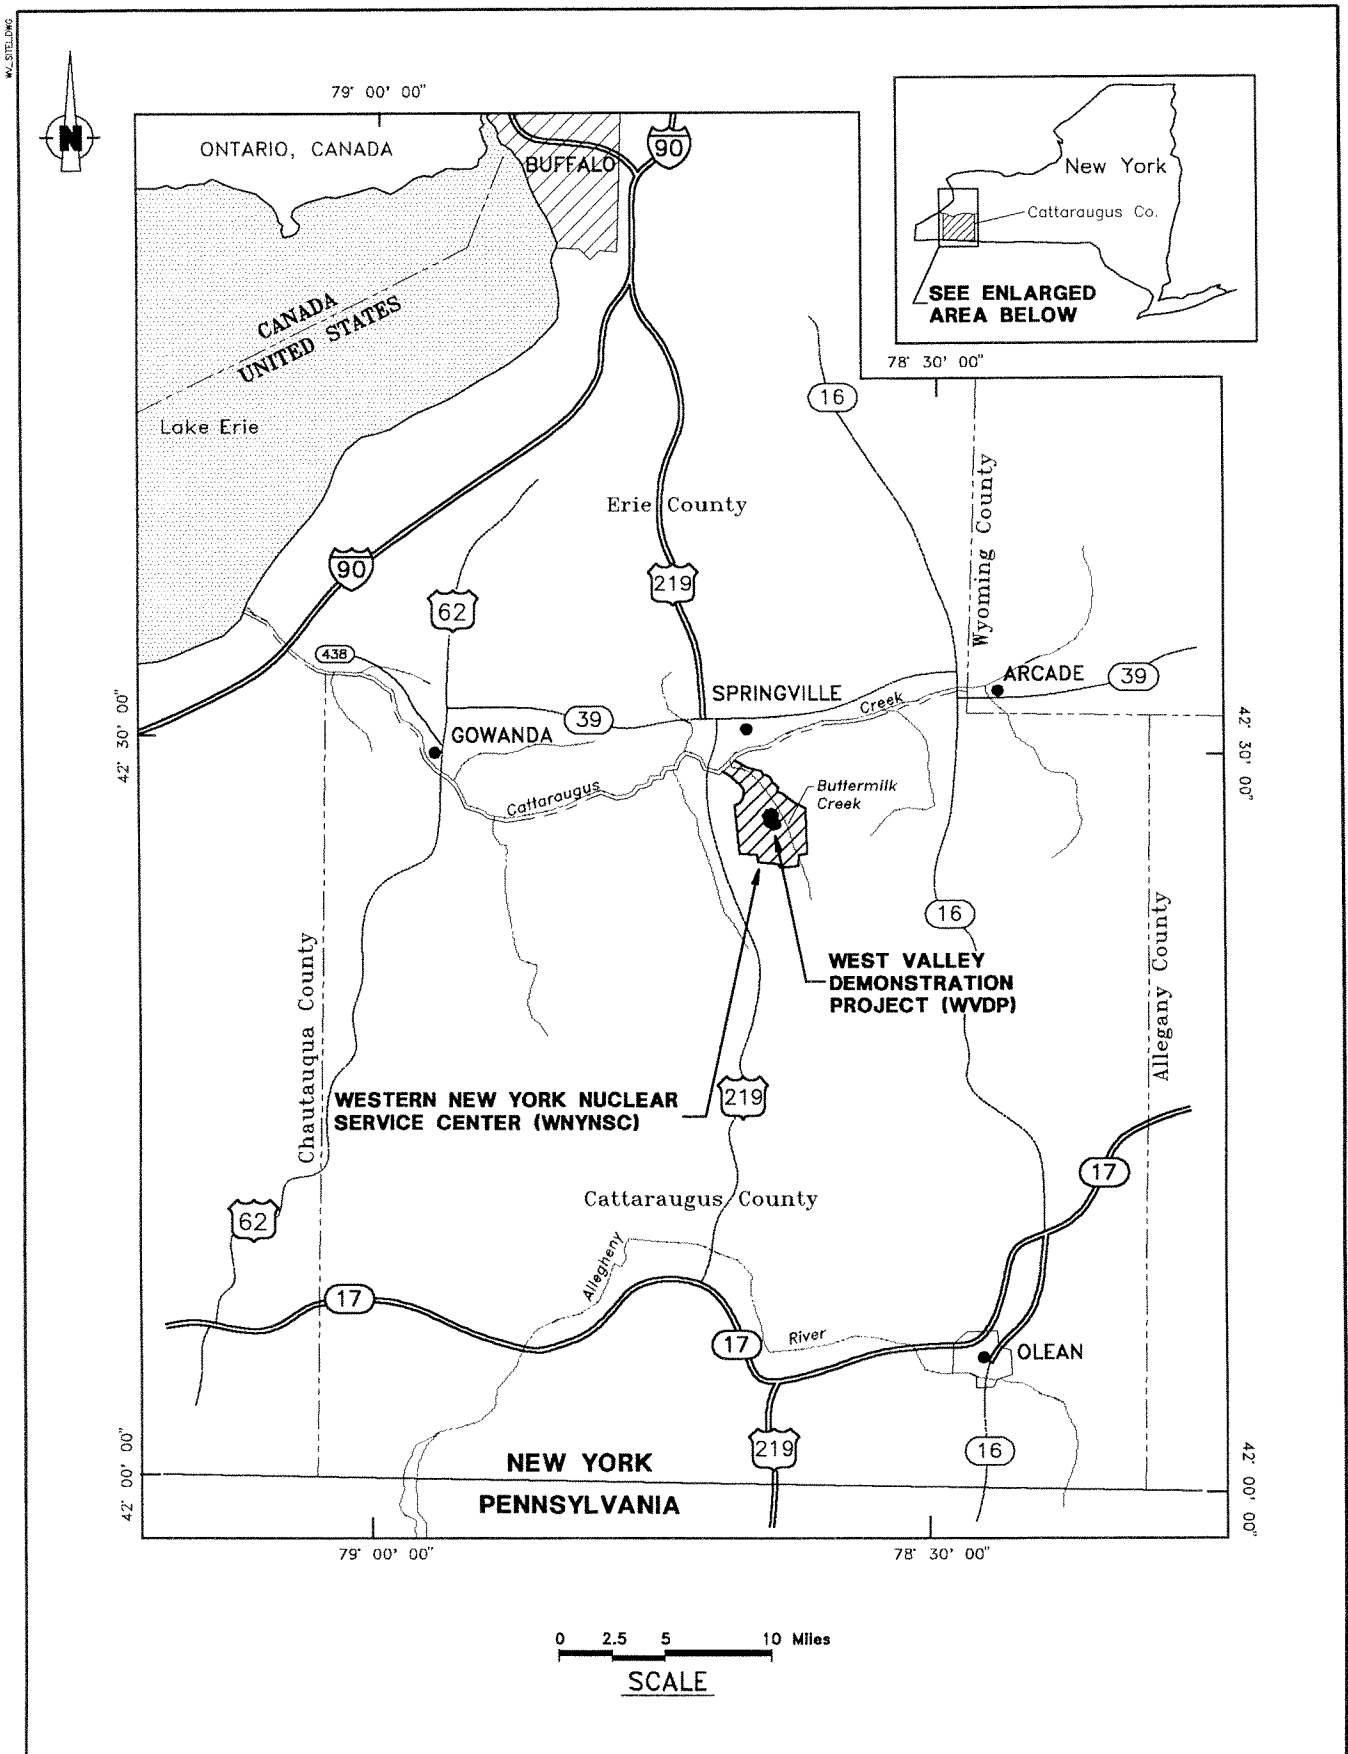


Figure 1-1. Location of the Western New York Nuclear Service Center.

Socioeconomics

The WNYNSC lies within the town of Ashford in Cattaraugus County. The nearby population, approximately 9,200 residents within 10 kilometers (6.2 mi) of the Project, relies primarily on an agricultural economy. No major industries are located within this area.

The land immediately adjacent to the WNYNSC is used primarily for agriculture and arboriculture. Cattaraugus Creek is used locally for swimming, canoeing, and fishing. Although some water to irrigate nearby golf course greens and tree farms is taken from Cattaraugus Creek, no public water supply is drawn from the creek downstream of the WNYNSC before the creek flows into Lake Erie near Buffalo, New York. Waters from Lake Erie are used as a public water supply.

Climate

Although there are recorded extremes of 37°C (98.6°F) and - 42°C (- 43.6°F) in Western New York, the climate is moderate, with an average annual temperature of 7.2°C (45.0°F). Rainfall is relatively high, averaging about 104 centimeters (41 in) per year. The 94.9 centimeters (37.35 in) of precipitation in 1993 was less than usual. Precipitation is evenly distributed throughout the year and is markedly influenced by Lake Erie to the west and, to a lesser extent, by Lake Ontario to the north. Regional winds are generally from the west and south at about 4 m/sec (9 mph).

Biology

The WNYNSC lies within the northern deciduous forest biome, and the diversity of its vegetation is typical of the region. Equally divided between forest and open land, the site provides a habitat especially attractive to white-tailed deer and various indigenous birds, reptiles, and small mammals. No species on the federal endangered list are known to be present on the WNYNSC.

Geology and Groundwater Hydrology

The WVDP site is located on the west shoulder of a steep-sided glacially scoured bedrock valley that is filled with a thick sequence of glacial sediments. (See Figs. 3-1 and 3-2 in *Chapter 3, Groundwater Monitoring*.) The WVDP site is bordered by two stream valleys (Frank's Creek and Quarry Creek) and divided by a third stream valley (Erdman Brook) into two portions, the north and south plateaus. (See Fig. 3-3 in *Chapter 3, Groundwater Monitoring*.)

The uppermost layer of glacial sediments on the south plateau consists of a silty clay till, the Lavery till. The Lavery till does not transmit significant quantities of water except where it is exposed at ground surface, where weathering has created an extensive fracture system. Groundwater flow in the weathered till has both a vertically downward component and a horizontal component to the northeast. Groundwater flow in the unweathered portion of the till, beneath the exposed weathered till, is predominantly vertically downward.

On the north plateau a relatively permeable alluvial sand and gravel layer overlies the glacial sequence of sediments (i.e., the Lavery till, the Kent recessional sequence, and the Kent till). This silty sand and gravel unit is composed of a glacial deposit overlain by post-glacial alluvial deposits. This composite of glacial and post-glacial deposits reaches a thickness of 41 feet in the center of the north plateau, then thins and pinches out along the north plateau's western edge. Groundwater flow in the sand and gravel unit of the north plateau is predominantly horizontal, towards the northeast, recharging from precipitation and fractured bedrock sources and discharging to seeps and streams along the plateau's edge and to evapotranspiration.

Within the Lavery till on the north plateau is a silty, sandy unit of limited areal extent, the Lavery till-sand. Located primarily beneath the center of the north plateau, it ranges in thickness

from less than 1 foot to 9 feet. However, the flow of groundwater within the till-sand appears to be very limited. Surface discharge points have not been observed, but gradients indicate flow to the southeast.

Acronyms

Acronyms often are used in technical reports to speed up the reading process. Although using acronyms can be a practical way of referring to agencies or systems with long, unwieldy names, having to look up rarely used acronyms can defeat the purpose of using them. Accordingly, full names of agencies and systems have been used in this report where it will help the reader. However, common acronyms that the reader is apt to be familiar with (e.g., DOE, EPA, NRC, NYSDEC) or that are used often in this report (e.g., WVDP, WNYNSC) are spelled out only at the beginning of sections. A list of acronyms may be found at the end of this report.

The Kent recessional sequence that underlies the Lavery till beneath both north and south plateaus is composed of silt and silty sand with small pockets of gravel. Under the eastern portions of the WVDP site the Kent recessional sequence ranges in thickness up to 75 feet and narrows along the southwest edge where the sediments meet the shoulder of the bedrock valley. Groundwater flow in the Kent recessional sequence is also towards the northeast, recharging from bedrock and from the overlying Lavery till and discharging ultimately to Buttermilk Creek.

Within the Lavery till on the both the north and south plateaus are other localized permeable units capable of letting groundwater flow through. The

uppermost few feet of shale bedrock has also demonstrated the ability to let significant quantities of groundwater flow through via fractures.

Information in this Report

Individual chapters in this report include information on compliance with regulations, general information about the monitoring program and significant activities in 1993, summaries of the results of radiological and nonradiological monitoring, and calculations of radiation doses to the population within 80 kilometers of the site. Where appropriate, graphs and tables are included to illustrate important trends and concepts. The bulk of the supporting data is furnished separately in the appendices following the text.

Appendix A summarizes the 1993 environmental monitoring program at both on-site and off-site locations. Samples are designated by a coded abbreviation indicating sample type and location. (A complete listing of the codes is found in the index to *Appendix A*.) *Appendix A* lists the kinds of samples taken, the frequency of collection, the parameters analyzed, the location of the sample points, and a brief rationale for the monitoring activities conducted at each location.

Appendix B provides a list of those radiation protection standards most relevant to the operation of the WVDP as set by the Department of Energy. It also lists federal and state regulations that affect the WVDP and environmental permits held by the site.

Appendix C summarizes analytical data from air, water, sediment, soils, and biological samples (meat, milk, food crops, and fish) as well as direct radiation measurements and meteorological monitoring.

Appendix D provides data from the comparison of results from analysis of identically prepared samples (crosscheck analyses) by both the WVDP and independent laboratories. Radio-

logical concentrations in crosscheck samples of air, water, soil, milk, and vegetation are reported here, as are chemical concentrations from water crosscheck samples. *Appendix D* also lists the comparisons of direct radiation measurements from thermoluminescent dosimeters (TLDs) monitored by the WVDP and measurements from dosimeters placed in the same locations by the Nuclear Regulatory Commission (NRC).

Appendix E summarizes the data collected from on-site groundwater monitoring. Tables and graphs report concentrations at various locations for parameters such as gross alpha and gross beta, tritium, gamma-emitting isotopes, organic compounds, and dissolved metals.

Environmental Monitoring Program

The environmental monitoring program for the West Valley Demonstration Project began in February 1982. The primary program goal is to detect changes in the environment resulting from Project activities and to assess the effect of any such changes on the human population and the environment surrounding the site.

The monitoring network and sample collection schedule have been structured to accommodate specific biological and physical characteristics of the area. Among the several factors considered in designing the environmental monitoring program were the kinds of wastes and other byproducts resulting from the processing of high-level waste; possible routes that radiological and nonradiological contaminants could follow into the environment; geologic, hydrologic, and meteorologic site conditions; quality assurance standards for monitoring and sampling procedures and analyses; and the limits and standards set by federal and state governments and agencies. As new processes and systems become part of the program, additional monitoring is provided.

Monitoring and Sampling

The environmental monitoring program consists of on-site effluent monitoring and on-site and off-site environmental surveillance in which samples are measured for both radiological and

Permits and Regulations

Data gathering, analysis, and reporting to meet stringent federal and state requirements and standards are an integral part of the monitoring program. The current program meets the requirements of DOE Orders 5400.1 and 5400.5 and DOE Regulatory Guide DOE/EH-0173T.

The West Valley Demonstration Project also possesses a State Pollutant Discharge Elimination System (SPDES) permit as required by the New York State Department of Environmental Conservation (NYSDEC), which regulates liquid effluent discharges containing nonradiological pollutants. The SPDES permit identifies the outfalls where liquid effluents are released to site drainage and specifies the sampling and analytical requirements for each outfall.

In addition, the site operates under state-issued air discharge permits for nonradiological plant effluents. Radiological air discharges must also comply with the National Emissions Standards for Hazardous Air Pollutants (NESHAP).

For more information see the ENVIRONMENTAL COMPLIANCE SUMMARY: CALENDAR YEAR 1993. Environmental permits are listed in APPENDIX B.

nonradiological constituents. (See the *Glossary* for more detailed definitions of effluent monitoring and environmental surveillance.) Monitoring and surveillance include both the continuous recording of data and the collecting of soil, sediment, water, air, and other samples at specific times.

Monitoring and sampling of environmental media provide two ways of assessing the effects of on-site radioactive waste processing. Monitoring generally is a continuous process of measurement that allows rapid detection of any potential effects on the environment from site activities. Sampling is the collection of media at scheduled times; sampling is slower than direct monitoring in indicating results because the samples collected must be analyzed in a laboratory to obtain data, but it allows much smaller quantities of radioactivity to be detected through the analysis.

Exposure Pathways Monitored at the West Valley Demonstration Project

The major near-term pathways for potential movement of possible contaminants away from the site are by surface water drainage and airborne transport. For this reason the environmental monitoring program emphasizes the collection of air and surface water samples. Samples are collected on-site from locations such as plant ventilation stacks as well as various water effluent points and surface water drainage locations. Samples of air, water, soils, and biota from the environment surrounding the site would indicate any radioactivity that might reach the public from site releases. Extensive groundwater monitoring addresses many long-term pathway concerns.

Water and Sediment Pathways

Process waters are collected in a series of on-site lagoons for treatment before being discharged. This

effluent and the effluent at three other discharge points is collected regularly or, in the case of lagoon 3, when the lagoon water is released. The samples are analyzed for both radiological and nonradiological parameters, including gross alpha and gross beta, tritium, strontium-90, gamma isotopes, and pH and conductivity. Additional analyses of composite samples determine metals content, solids, biochemical oxygen demand, nitrates, nitrites, ammonia, sulfate, organic chemicals, and specific isotopic radioactivity.

On-site groundwater and surface water samples are collected regularly and analyzed, at a minimum, for gross alpha and beta radioactivity, tritium, and pH. Selected samples are analyzed for conductivity, chlorides, metals, volatile organic compounds, and other parameters. Potable water on the site is analyzed monthly for radioactivity and annually for chemical constituents. Residential drinking water wells located near the site are sampled annually and analyzed for gross alpha and gross beta radioactivity, tritium, gamma isotopes, pH, and conductivity.

Off-site surface waters, primarily from Cataraugus Creek and Buttermilk Creek, are sampled both upstream of the Project for background radioactivity and downstream to measure possible Project contributions. Sediments deposited downstream of the facility and at upstream background locations are collected semiannually and analyzed for gross alpha, gross beta, and specific radionuclides. (See *Appendix C-1* for water and sediment data summaries.)

Groundwater Pathways

Groundwater discharge at the WVDP site occurs as springs, seeps along stream channels, direct discharge to streams, evapotranspiration, vertical groundwater outflow, and discharge to artificial draining systems and lagoons. All of these discharges vary with the seasons. Discharge from springs and seeps is highest during the spring. Evapotranspiration is at a maximum during the

summer. Groundwater discharge is, in general, lowest during the winter because of the frozen ground surface.

Routine monitoring of groundwater includes sampling for indicator and groundwater quality parameters. Additional sampling for radiological and nonradiological parameters (e.g., volatiles, semivolatiles, metals, pesticides, and PCBs) is included under the expanded groundwater characterization monitoring program.

Air Pathways

Effluent air emissions are continuously monitored for alpha and beta activity. Remote alarms indicate any unusual rise in radioactivity. Air particulate filters, which are retrieved and analyzed weekly for gross radioactivity, are also composited quarterly and analyzed for strontium-90 and specific gamma- and alpha-emitting nuclides.

Iodine-129 and tritium also are measured in effluent ventilation air. At two locations silica gel-filled columns are used to extract water vapor that is then distilled from the desiccant and analyzed for tritium. Four samplers contain activated charcoal adsorbent that is analyzed for radioiodine. The silica gel columns are analyzed weekly; the charcoal is collected weekly and composited for quarterly analysis.

Off-site sampling locations include those considered most representative of background conditions and those most likely to be downwind of airborne releases. Among the criteria used to position off-site air samplers are prevailing wind direction, land usage, and the location of population centers.

Off-site air is continuously sampled at ten locations. Background samplers are located far from the site in Great Valley and Dunkirk, New York. Nearby-community samplers are in Springville and West Valley, New York. (See Fig. A-9 in *Appendix A* for these four off-site air sampling

locations.) Six samplers are located on the perimeter of the WNYNSC. (See Fig. 2-2 in *Chapter 2, Environmental Monitoring*.) These samples are analyzed for parameters similar to the effluent air samples. (See *Appendix C-2* for air monitoring data summaries.)

Atmospheric Fallout

An important contributor to environmental radioactivity is atmospheric fallout. Sources of fallout include earlier atmospheric testing of atomic explosives and residual radioactivity from accidents such as occurred at Chernobyl. Four site perimeter locations and one on-site location currently are sampled for fallout using pot-type samplers that are collected every month. Long-term fallout is determined by analyzing soil collected annually at each of the six perimeter and four off-site air samplers. (See *Appendix C-2* for fallout data summaries and *Appendix C-1* for soil data summaries.)

Food Pathways

Another potentially significant pathway is via domesticated farm animals and produce raised near the WVDP and through game animals and fish that include the WVDP in their range. Animal and fish samples from potentially affected areas are gathered and analyzed for radionuclide content in order to reveal any long-term trends. Fish are collected at several locations along Cattaraugus Creek and its tributaries at various distances downstream from the WVDP. Beef, milk, hay, and produce are collected at nearby farms and at selected locations well away from any possible WVDP influence. (See *Appendix C-3* for biological data summaries.)

Direct Radiation Measurement

Direct penetrating radiation is measured using thermoluminescent dosimeters (TLDs) located on- and off-site. Measurement points within the site are placed near selected waste management units and around the inner security fence. Other measurement

locations are situated around the site perimeter and access road and at background locations remote from the WVDP. Forty-one measurement points were used in 1993. The TLDs are retrieved quarterly and read out on-site to obtain the integrated gamma exposure. (See *Appendix C-4* for direct radiation data summaries.)

Meteorological Monitoring

Meteorological data are continuously gathered and recorded on-site. Wind speed and direction, barometric changes, dew point, temperature, and rainfall are all measured. Such data are valuable in evaluating long-term geohydrological trends and in developing airborne dispersion models. In the event of an emergency, immediate access to the most recent data is indispensable for predicting the path and concentration of any materials that become airborne. (See *Appendix C-6* for meteorological data summaries.)

Quality Assurance and Control

The work performed by and through the on-site Environmental Laboratory is regularly reviewed by several agencies for accuracy and compliance with applicable regulations. Audits of the laboratory routinely focus on proper record keeping and reporting, timely calibration of equipment, training of personnel, adherence to accepted procedures, and general laboratory safety.

The Environmental Laboratory also participates in several quality assurance crosscheck programs administered by federal or state agencies. (See *Appendix D* for a summary of crosscheck performance.) Outside laboratories contracted to perform analyses for the WVDP also are regularly subjected to performance audits.

Environmental monitoring management continued to strengthen its formal self-assessment program, developing and implementing new strategies and procedures for ensuring high quality data. Experienced senior scientists and specialists in varying disciplines follow an annual schedule of quarterly internal appraisals, produce formal reports with recommended corrective actions, and track the planned actions for their implementation.