

APPENDIX J
EVALUATION OF HUMAN HEALTH EFFECTS FROM
TRANSPORTATION

APPENDIX J

EVALUATION OF HUMAN HEALTH EFFECTS FROM TRANSPORTATION

J.1 Introduction

Transportation of any commodity involves a risk to both transportation crew members and members of the public. This risk results directly from transportation-related accidents and indirectly from increased levels of pollution from vehicle emissions, regardless of the cargo. The transportation of certain materials, such as hazardous or radioactive waste, can pose an additional risk due to the unique nature of the material itself. To permit a complete appraisal of the environmental impacts of the Proposed Action and alternatives, the human health risks associated with the transportation of radioactive materials on public highways and railroads were assessed.

This appendix provides an overview of the approach used to assess the human health risks that could result from transportation. The topics in this appendix include the scope of the assessment, packaging and determination of potential transportation routes, analytical methods used for the risk assessment (e.g., computer models), and important assessment assumptions. In addition, to aid in the understanding and interpretation of the results, specific areas of uncertainty are described with an emphasis on how the uncertainties may affect comparisons of the alternatives.

The risk assessment results are presented in this appendix in terms of “per-shipment” risk factors, as well as the total risks for a given alternative. Per-shipment risk factors provide an estimate of the risk from a single shipment. The total risks for a given alternative are estimated by multiplying the expected number of shipments by the appropriate per-shipment risk factors.

J.2 Scope of Assessment

The scope of the transportation human health risk assessment, including the alternatives and options, transportation activities, potential radiological and nonradiological impacts, and transportation modes, is described in this section. There are several shipping arrangements for various radioactive wastes that cover all alternatives evaluated. This evaluation focuses on using onsite and offsite public highways and rail systems. Additional details of the assessment are provided in the remaining sections of this appendix.

J.2.1 Transportation-related Activities

The transportation risk assessment is limited to estimating the human health risks related to transportation for each alternative. The risks to workers or to the public during loading, unloading, and handling prior to or after shipment are addressed in Section 4.1.9, Human Health and Safety, of the environmental impact statement (EIS). The impacts of increased transportation levels on local traffic flow or infrastructure are addressed in Section 4.1.2, Site Infrastructure.

J.2.2 Radiological Impacts

For each alternative, radiological risks (i.e., those risks that result from the radioactive nature of the materials) are assessed for both incident-free (i.e., normal) and accident transportation conditions. The radiological risk associated with incident-free transportation conditions would result from the potential exposure of people to external radiation in the vicinity of a shipment. The radiological risk from transportation accidents would

come from the potential release and dispersal of radioactive material into the environment during an accident and the subsequent exposure of people.

All radiological impacts are calculated in terms of committed dose and associated health effects in the exposed populations. The radiation dose calculated is the total effective dose equivalent (see Title 10 of the *Code of Federal Regulations* [CFR], Part 20 [10 CFR Part 20]), which is the sum of the effective dose equivalent from external radiation exposure and the 50-year committed effective dose equivalent from internal radiation exposure. Radiation doses are presented in units of roentgen equivalent man (rem) for individuals and person-rem for collective populations. The impacts are further expressed as health risks in terms of latent cancer fatalities (LCFs) in exposed populations using the dose-to-risk conversion factors recommended by the U.S. Department of Energy (DOE) Office of NEPA [National Environmental Policy Act] Policy and Compliance, based on Interagency Steering Committee on Radiation Standards guidance (DOE 2003a).

J.2.3 Nonradiological Impacts

In addition to the radiological risks posed by transportation activities, vehicle-related risks are also assessed for nonradiological causes (i.e., causes related to the transport vehicles and not the radioactive cargo) for the same transportation routes. The nonradiological transportation risks, which would be incurred for similar shipments of any commodity, are assessed for accident conditions. The nonradiological accident risk refers to the potential occurrence of transportation accidents that result in fatalities unrelated to the radioactive nature of the cargo.

Nonradiological risks during incident-free transportation conditions could also be caused by potential exposure to increased vehicle exhaust emissions. As explained later in Section J.5.2, these emission impacts were not considered.

J.2.4 Transportation Modes

All shipments are assumed to take place by either dedicated truck or rail.

J.2.5 Receptors

Transportation-related risks are calculated and presented separately for workers and members of the general public. The workers considered are truck and rail crew members involved in transportation and inspection of the packages. The general public includes all persons who could be exposed to a shipment while it is moving or stopped during transit. For the incident-free operation, the affected population includes individuals living within 800 meters (0.5 miles) of each side of the road or rail line. Potential risks are estimated for the affected populations and for the hypothetical maximally exposed individual (MEI). For incident-free operation, the MEI would be a resident living near the highway or rail line and exposed to all shipments transported on the road or rail line. For accident conditions, the affected population includes individuals residing within 80 kilometers (50 miles) of the accident, and the MEI would be an individual located 100 meters (330 feet) directly downwind from the accident. The risk to the affected population is a measure of the radiological risk posed to society as a whole by the alternative being considered. As such, the impact on the affected population is used as the primary means of comparing various alternatives.

J.3 Packaging and Transportation Regulations

This section provides a high level, brief summary of packaging and transportation regulations. The regulations pertaining to the transportation of radioactive materials are detailed in the CFR published by the U.S. Department of Transportation (DOT), U.S. Nuclear Regulatory Commission (NRC), and U.S. Postal Service. Specifics on details on these regulations can be found in 49 CFR Part 106, 107, 171-178

(DOT regulations); 10 CFR Part 20, 61, and 71 (NRC regulations), and 39 CFR Part 121 (U.S. Postal Service regulations). Interested readers are encouraged to visit the cited CFRs for current detailed regulations, or review the DOT RAMREG-001-98 (DOT 1998) for a comprehensive discussion on radioactive material regulations.

J.3.1 Packaging Regulations

The primary regulatory approach to promote safety from radiological exposure is the specification of standards for the packaging of radioactive materials. Packaging represents the primary barrier between the radioactive material being transported and radiation exposure to the public, workers, and the environment. Transportation packaging for radioactive materials must be designed, constructed, and maintained to contain and shield its contents during normal transport conditions. For highly radioactive material, such as high-level radioactive waste or spent nuclear fuel, packaging must contain and shield the contents in the event of severe accident conditions. The type of packaging used is determined by the total radioactive hazard presented by the material within the packaging. Four basic types of packaging are used: Excepted, Industrial, Type A, and Type B. Specific requirements for these packages are detailed in 49 CFR 173.400. All packages are designed to protect and retain their content under normal operations.

Excepted packagings are limited to transporting materials with extremely low levels of radioactivity and very low external radiation. Industrial packagings are used to transport materials that, because of their low concentration of radioactive materials, present a limited hazard to the public and the environment. Type A packagings are designed to protect and retain their contents under normal transport conditions, and because of higher radioactive content it must maintain sufficient shielding to limit radiation exposure to handling personnel. Type A packaging, typically a 0.21-cubic-meter (55-gallon) drum or standard waste box, is commonly used to transport radioactive materials with higher concentrations or amounts of radioactivity than Excepted or Industrial packages. Type B packagings are used to transport material with the highest radioactivity levels, and are designed to protect and retain their contents under transportation accident conditions. They are described in more detail in the following sections. Packaging requirements are an important consideration for transportation risk assessment.

Radioactive materials shipped in Type A containers, or packagings, are subject to specific radioactivity limits, identified as A1 and A2 values in 49 CFR 173.435 (“Table of A1 and A2 Values for Radionuclides”). In addition, external radiation limits, as prescribed in 49 CFR 173.441 (“Radiation Level Limitations”), must be met. If the A1 or A2 limits are exceeded, the material must be shipped in a Type B container unless it can be demonstrated that the material meets the definition of “low specific activity.” If the material qualifies as low specific activity as defined in 10 CFR Part 71 (“Packaging and Transportation of Radioactive Material”) and 49 CFR Part 173, it may be shipped in a shipping container such as Industrial or Type A Packaging (49 CFR 173.427), see also RAMREG-001-98 (DOT 1998). Type B containers, or casks, are subject to the radiation limits in 49 CFR 173.441, but no quantity limits are imposed except in the case of fissile materials and plutonium.

Type A packagings are designed to retain their radioactive contents in normal transport. Under normal conditions, a Type A package must withstand:

- Operating temperatures ranging from -40 degrees Celsius (°C) (-40 degrees Fahrenheit [°F]) to 70 °C (158 °F);
- External pressures ranging from 0.25 to 1.4 kilograms per square centimeter (3.5 to 20 pounds per square inch);
- Normal vibration experienced during transportation;

- Simulated rainfall of 5 centimeters (2 inches) per hour for 1 hour;
- Free fall from 0.3 to 1.2 meters (1 to 4 feet), depending on the package weight;
- Water immersion-compression tests; and
- Impact of a 6-kilogram (13-pound) steel cylinder with rounded ends dropped from 1 meter (3.3 feet) onto the most vulnerable surface.

Type B packagings are designed to retain their radioactive contents in both normal and accident conditions. In addition to the normal conditions outlined earlier, under accident conditions, a Type B package must withstand:

- Free drop from 9 meters (30 feet) onto an unyielding surface in a position most likely to cause damage;
- Free drop from 1 meter (3.3 feet) onto the end of a 15-centimeter (6-inch) diameter vertical steel bar;
- Exposure to temperatures of 800 °C (1,475 °F) for at least 30 minutes;
- For all packages, immersion in at least 15 meters (50 feet) of water;
- For some packages, immersion in at least 0.9 meters (3 feet) of water in an orientation most likely to result in leakage; and
- For some packages, immersion in at least 200 meters (660 feet) of water for 1 hour.

Compliance with these requirements is demonstrated by using a combination of simple calculation methods, computer modeling techniques, or scale-model or full-scale testing of transportation packages, or casks.

J.3.2 Transportation Regulations

The regulatory standards for packaging and transporting radioactive materials are designed to achieve four primary objectives:

- Protect persons and property from radiation emitted from packages during transportation by specific limitations on the allowable radiation levels;
- Contain radioactive material in the package (achieved by packaging design requirements based on performance-oriented packaging integrity tests and environmental criteria);
- Prevent nuclear criticality (an unplanned nuclear chain reaction that could occur as a result of concentrating too much fissile material in one place); and
- Provide physical protection against theft and sabotage during transit.

DOT regulates the transportation of hazardous materials in interstate commerce by land, air, and water. DOT specifically regulates the carriers of radioactive materials and the conditions of transport, such as routing, handling and storage, and vehicle and driver requirements. DOT also regulates the labeling, classification, and marking of radioactive material packagings.

NRC regulates the packaging and transporting of radioactive material for its licensees, including commercial shippers of radioactive materials. In addition, under an agreement with DOT, NRC sets the standards for packages containing fissile materials and Type B packagings.

DOE, through its management directives, Orders, and contractual agreements, ensures the protection of public health and safety by imposing on its transportation activities standards equivalent to those of DOT and NRC. According to 49 CFR 173.7(d), packagings made by or under the direction of DOE may be used for transporting Class 7 materials (radioactive materials) when the packages are evaluated, approved, and certified by DOE against packaging standards equivalent to those specified in 10 CFR Part 71 (“Packaging and Transportation of Radioactive Material”).

DOT also has requirements that help to reduce transportation impacts. Some requirements affect drivers, packaging, labeling, marking, and placarding. Others specifying the maximum dose rate from radioactive material shipments help to reduce incident-free transportation doses.

The Federal Emergency Management Agency (FEMA) is responsible for establishing policies for, and coordinating civil emergency management, planning, and interaction with, Federal Executive agencies that have emergency response functions in the event of a transportation incident. FEMA, an agency of the Department of Homeland Security, coordinates Federal and State participation in developing emergency response plans and is responsible for the development of the interim Federal Radiological Emergency Response Plan. This plan is designed to coordinate Federal support to state and local governments, upon request, during the event of a transportation incident involving radioactive materials.

J.4 Transportation Analysis Impact Methodology

The transportation risk assessment is based on the alternatives described in Chapter 2 of the EIS. **Figure J-1** summarizes the transportation risk assessment methodology. After the EIS alternatives were identified and the requirements of the shipping campaign were understood, data was collected on material characteristics and accident parameters.

Transportation impacts calculated in the EIS are presented in two parts: impacts of incident-free or routine transportation and impacts of transportation accidents. Impacts of incident-free transportation and transportation accidents were further divided into nonradiological and radiological impacts. Nonradiological impacts could result from transportation accidents in terms of traffic fatalities. Radiological impacts of incident-free transportation include impacts on members of the public and crew from radiation emanating from materials in the shipment. Radiological impacts from accident conditions consider all foreseeable scenarios that could damage transportation packages leading to releases of radioactive materials to the environment.

The impact of transportation accidents is expressed in terms of probabilistic risk, which is the probability of an accident multiplied by the consequences of that accident and summed over all reasonably conceivable accident conditions. Hypothetical transportation accident conditions ranging from low-speed “fender-bender” collisions to high-speed collisions with or without fires were analyzed. The frequencies of accidents and consequences were evaluated using a method developed by NRC and originally published in the *Final Environmental Impact Statement on the Transportation of Radioactive Materials by Air and Other Modes*, NUREG-0170 (NRC 1977); *Shipping Container Response to Severe Highway and Railway Accident Conditions*, NUREG/CR-4829 (NRC 1987); and, *Reexamination of Spent Fuel Shipping Risk Estimates*, NUREG/CR-6672 (NRC 2000). Hereafter, these reports are cited as: *Radioactive Material Transport Study*, NUREG-0170; *Modal Study*, NUREG/CR-4829; and *Reexamination Study*, NUREG/CR-6672. Radiological accident risk is expressed in terms of additional LCFs, and nonradiological accident risk is expressed in terms of additional immediate (traffic) fatalities. Incident-free risk is also expressed in terms of additional LCFs.

Transportation-related risks were calculated and are presented separately for workers and members of the general public. The workers considered are truck/rail crew members involved in the actual transportation. The general public includes all persons who could be exposed to a shipment while it is moving or stopped during transit.

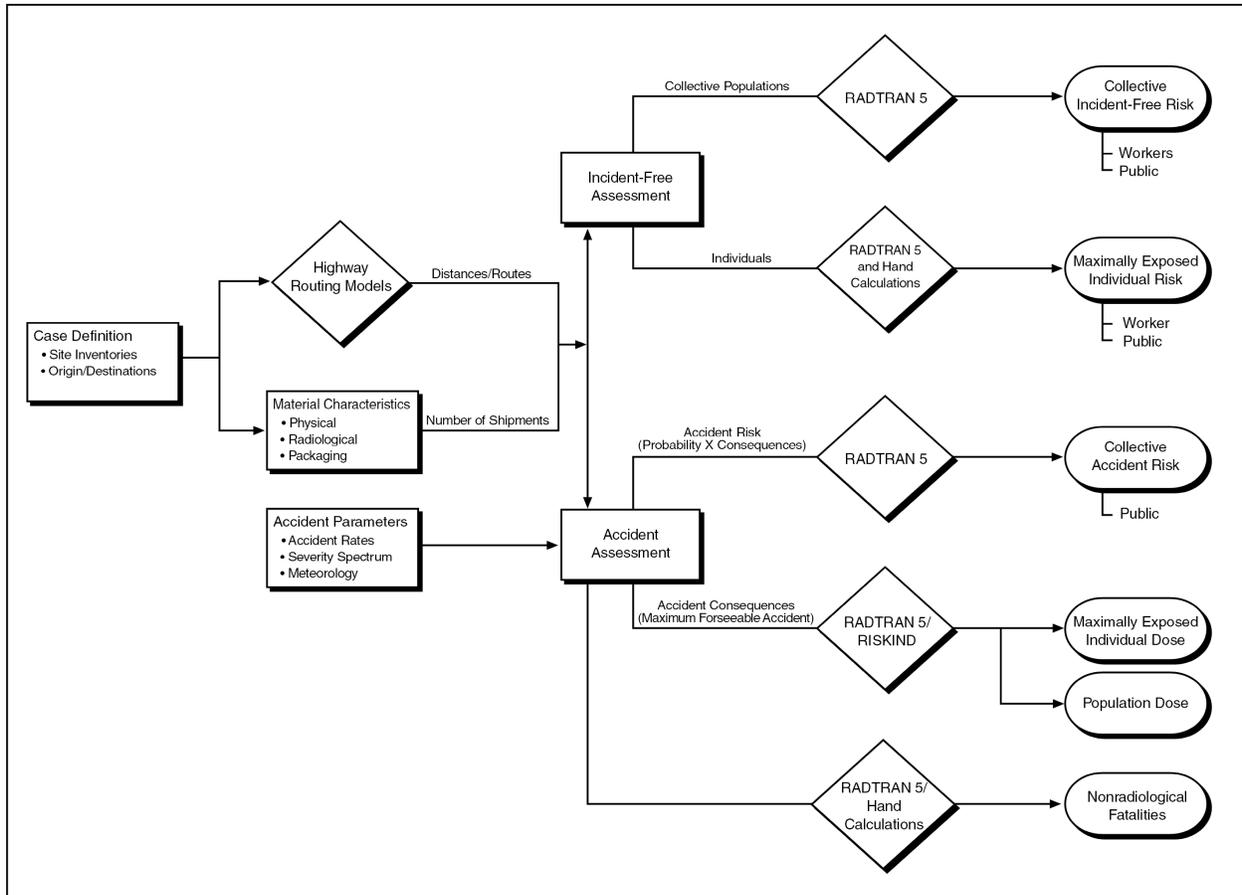


Figure J-1 Transportation Risk Assessment

The first step in the ground transportation analysis was to determine the distances and populations along the routes. The Transportation Routing Analysis Geographic Information System (TRAGIS) computer program (Johnson and Michelhaugh 2003) was used to choose representative routes and the associated distances and populations. This information, along with the properties of the material being shipped and route-specific accident frequencies, was entered into the RADTRAN 5 computer code (Neuhauser and Kanipe 2003), which calculates incident and accident risks on a per-shipment basis. The risks under each alternative were determined by summing the products of per-shipment risks for each waste type by its number of shipments.

The RADTRAN 5 computer code (Neuhauser and Kanipe 2003) was used for incident-free and accident risk assessments to estimate the impacts on populations. RADTRAN 5 was developed by Sandia National Laboratories to calculate population risks associated with the transportation of radioactive materials by a variety of modes, including truck, rail, air, ship, and barge. RADTRAN 5 was used to calculate the doses to the MEIs during incident-free operations.

The RADTRAN 5 population risk calculations include both the consequences and probabilities of potential exposure events. The RADTRAN 5 code consequence analyses include the following exposure pathways; cloud shine, ground shine, direct radiation (from loss of shielding) inhalation (from dispersed materials), and resuspension (inhalation dose from resuspended materials) (Neuhauser et al. 2000). The collective population risk is a measure of the total radiological risk posed to society as a whole by the alternative being considered. As such, the collective population risk is used as the primary means of comparing the various alternatives.

The RISKIND computer code (Yuan et al. 1995) was used to estimate the doses to MEIs and populations for the worst-case maximum reasonably foreseeable transportation accident. The RISKIND computer code was developed for DOE's Office of Civilian Radioactive Waste Management to analyze the exposure of individuals during incident-free transportation. In addition, the RISKIND code was designed to allow a detailed assessment of the consequences to individuals and population subgroups from severe transportation accidents under various environmental settings.

The RISKIND calculations were conducted to supplement the collective risk results calculated with RADTRAN 5. Whereas the collective risk results provide a measure of the overall risks of each alternative, the RISKIND calculations are meant to address areas of specific concern to individuals and population subgroups. Essentially, the RISKIND analyses are meant to address "What if" questions, such as "What if I live next to a site access road?" or "What if an accident happens near my town?"

J.4.1 Transportation Routes

To assess incident-free and transportation accident impacts, route characteristics were determined for offsite shipments from the Western New York Nuclear Service Center (WNYNSC) Site in New York, to the:

- Hanford Site in Richland, Washington, (the route characteristics for this site were used as a proxy for a commercial Western U.S. disposal site for Class B and Class C wastes);
- Nevada Test Site (NTS) in Mercury, Nevada/Yucca Mountain, Nevada (the route characteristics for Yucca Mountain were used, for purposes of analysis only, for a Greater-Than-Class C waste disposal site.¹
- EnergySolutions site in Clive, Utah;
- Barnwell site, in Barnwell, South Carolina;² and
- Waste Isolation Pilot Plant (WIPP) site in Carlsbad, New Mexico (the route characteristics for this site were used, for purposes of analysis only, for a transuranic waste disposal site¹).

For offsite transport, highway and rail routes were determined using the routing computer program TRAGIS (Johnson and Michelhaugh 2003).³

The TRAGIS computer program is a geographic information system-based transportation analysis computer program used to identify and select highway, rail, and waterway routes for transporting radioactive materials within the United States. Both the road and rail network are 1:100,000-scale databases, which were developed from the U.S. Geological Survey digital line graphs and the U.S. Bureau of the Census Topological Integrated Geographic Encoding and Referencing System. The population densities along each route were derived from 2000 Census Bureau data (Johnson and Michelhaugh 2003). The features in TRAGIS allow users to determine routes for shipment of radioactive materials that conform to DOT regulations as specified in 49 CFR Part 397.

¹ A disposal facility for Greater-Than-Class C low-level radioactive waste and potential non-defense transuranic waste will be determined through the Disposal of Greater-Than-Class C Low-Level Radioactive Waste Environmental Impact Statement (DOE/EIS-0375).

² Since July 2008, Barnwell no longer accepts waste from sites outside the Southeast Compact.

³ There is direct rail access to the Hanford Site, Barnwell, and EnergySolutions. Direct rail access to NTS and Yucca Mountain is not available at the present time, but is under consideration as part of the access to the proposed geological repository at Yucca Mountain. For WIPP, while there is currently rail infrastructure at WIPP, there are no current plans to upgrade it so that rail shipments can be received.

Offsite Route Characteristics

Route characteristics that are important to the radiological risk assessment include the total shipment distance and population distribution along the route. The specific route selected determines both the total potentially exposed population and the expected frequency of transportation-related accidents. Route characteristics for Hanford, NTS, EnergySolutions, Barnwell, and WIPP transportation are summarized in **Table J-1**. Rural, suburban, and urban areas are characterized according to the following breakdown:

- Rural population densities range from 0 to 54 persons per square kilometer (0 to 139 persons per square mile);
- Suburban population densities range from 55 to 1,284 persons per square kilometer (140 to 3,326 persons per square mile); and
- Urban population densities include all population densities greater than 1,284 persons per square kilometer (3,326 persons per square mile).

Table J-1 Offsite Transport Truck and Rail Route Characteristics

Origin	Destination	Nominal Distance (kilometers)	Distance Traveled in Zones (kilometers)			Population Density in Zone (number per square kilometer)			Number of Affected Persons ^a
			Rural	Suburban	Urban	Rural	Suburban	Urban	
Truck Routes									
West Valley	Hanford ^b	4,113	3,240	791	82	11.2	294.6	2,307.8	733,507
	NTS/Yucca Mountain	3,944	3,069	770	105	11.1	305.8	2,406.9	835,796
	EnergySolutions	3,267	2,519	673	75	11.7	300	2,316.1	647,135
	Barnwell	1,507	885	587	35	17.4	310	2,198.9	439,681
	WIPP	3,155	2,104	947	104	14.5	319.2	2,256.3	906,774
Rail Routes									
West Valley	Hanford	4,195	3,348	680	167	7.3	388.7	2,420.1	1,106,846
	NTS ^c /Yucca Mountain	4,158	3,360	630	168	7.9	386.9	2,432.8	1,084,658
	EnergySolutions	3,425	2,636	622	167	9.6	387.6	2,433.7	1,077,758
	Barnwell	1,784	1,170	519	95	15.7	385.7	2,404.4	715,981
	WIPP	2,962	2,344	486	132	8.7	438.3	2,392.6	879,529

WIPP = Waste Isolation Pilot Plant, NTS = Nevada Test Site.

^a The estimated number of persons residing within 800 meters (0.5 miles) along the transportation route.

^b West Valley-Hanford site route characteristics were used as a proxy for a commercial Western U.S. disposal site for Class B/C wastes. Barnwell site disposal of this waste was also evaluated in this appendix, to provide environmental impact coverage and flexibility for use, should the site become available in future.

^c It was assumed that direct rail access to NTS would be available as part of the proposed geological repository at Yucca Mountain.

Note: To convert from kilometers to miles, multiply by 0.6214; to convert from number per square kilometer to number per square mile, multiply by 2.59.

The affected population for route characterization and incident-free dose calculation includes all persons living within 800 meters (0.5 miles) of each side of the transportation route.

Analyzed truck and rail routes for shipments of radioactive waste materials to the Hanford, NTS, Barnwell, EnergySolutions, and WIPP sites are shown on **Figure J-2**.

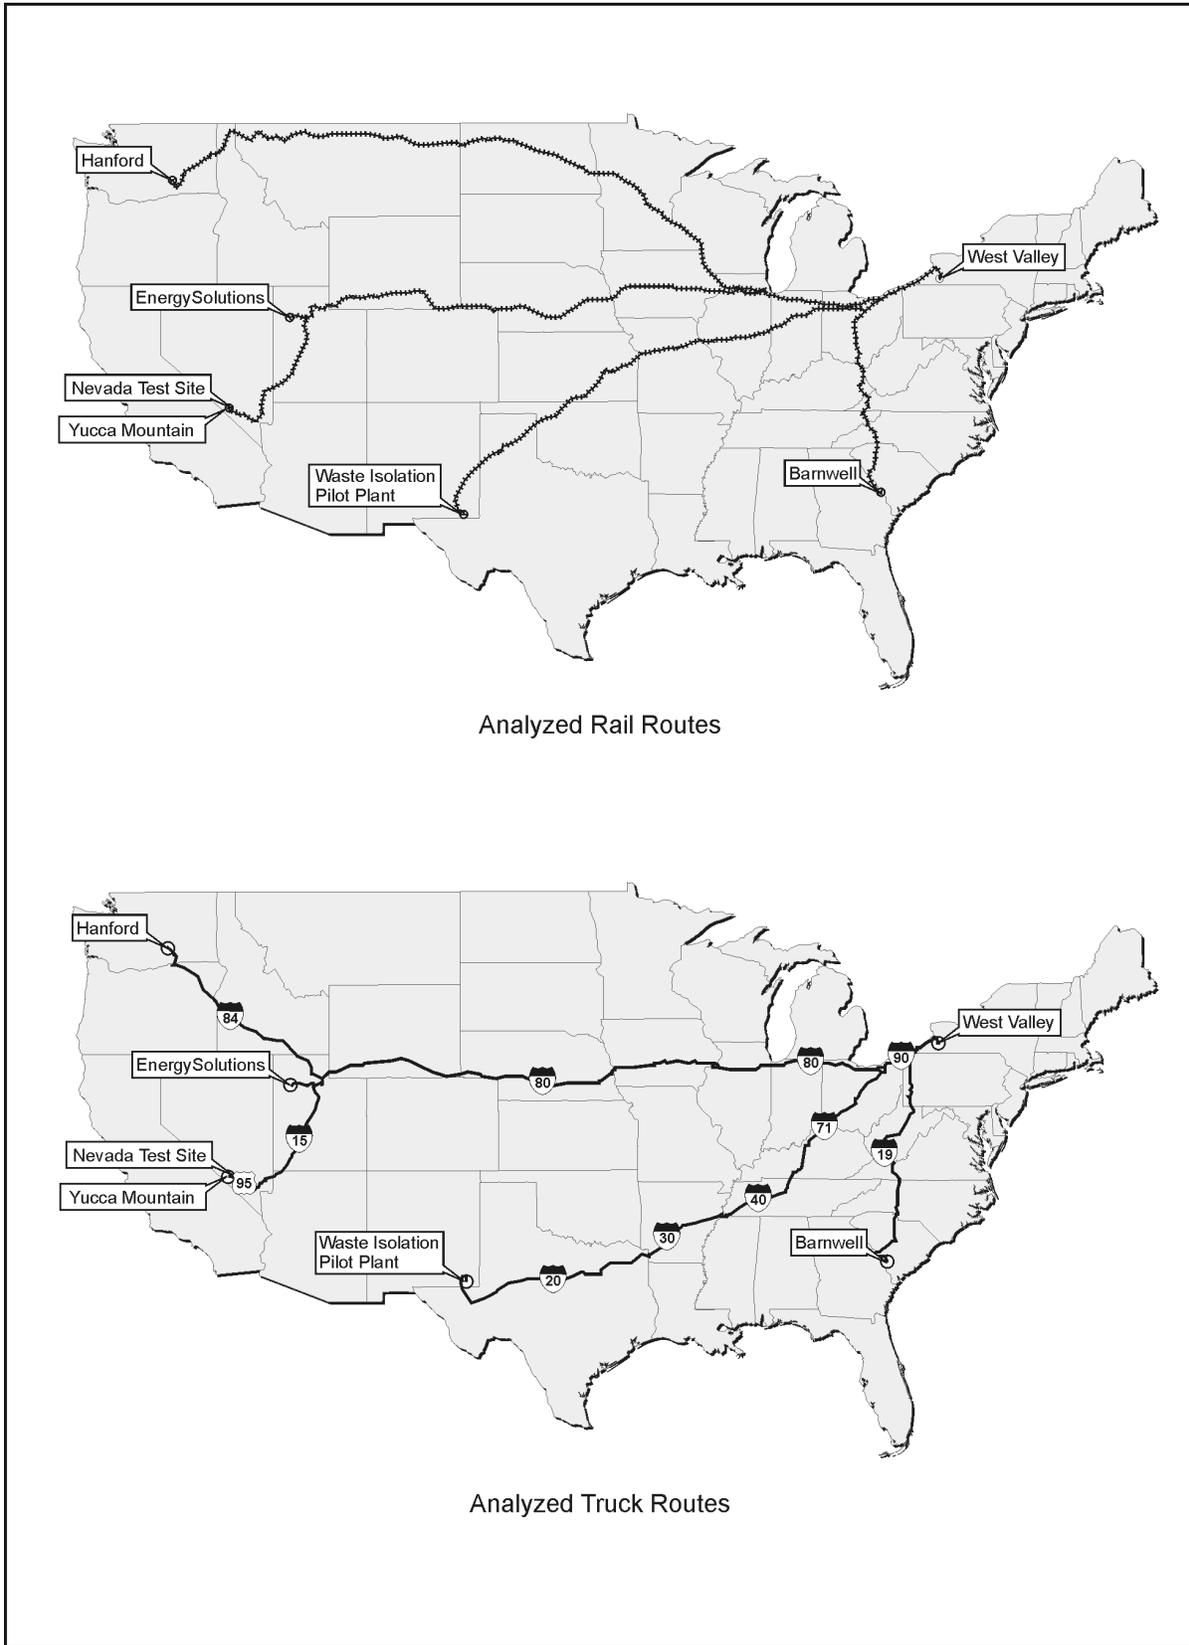


Figure J-2 Analyzed Truck and Rail Routes

J.4.2 Radioactive Material Shipments

Transportation of all waste types is assumed to be in certified or certified-equivalent packaging on exclusive-use vehicles. Legal-weight heavy-haul combination trucks are used for highway transportation. Type A packages are transported on common flatbed or covered trailers; Type B packages are generally shipped on trailers designed specifically for the packaging being used. For transportation by truck, the maximum payload weight is considered to be about 22,000 kilograms (about 48,000 pounds), based on the Federal gross vehicle weight limit of 36,288 kilograms (80,000 pounds). While there are large numbers of multi-trailer combinations (known as longer combination vehicles) with gross weights in excess of the Federal limit in operation on rural roads and turnpikes in some states (FHWA 2003), for evaluation purposes, the load limit for the legal truck was based on the Federal gross vehicle weight.

Rail transport can be done with dedicated and/or general freight trains. For analysis purposes, a dedicated train was assumed. The payload weights for railcars range from 45,359 to 68,039 kilograms (100,000 to 150,000 pounds). A median payload weight of 54,431 kilograms (120,000 pounds) was used in this analysis.

Several types of containers would be used to transport the generated waste. The various wastes that would be transported under the alternatives in this EIS include demolition and construction debris and hazardous waste, low-level radioactive waste, transuranic waste, and mixed low-level radioactive waste. **Table J-2** lists the types of containers used along with their volumes and the number of containers in a shipment. A shipment is defined as the amount of waste transported on a single truck or a single railcar. Multiple railcars (2 or more) per train could be used to reduce the number of rail transport. Since the rail accident and fatalities data are per railcar-kilometer (see section J.6.2), the transportation analysis presented here is based on one railcar per transport. While it may be possible to reduce the number of transports by using multiple railcars per train, there would be a proportional increase in the transportation risks per transport.

The number of shipping containers per shipment was estimated on the basis of dimensions and weight of the shipping containers, the Transport Index,⁴ which is the dose rate at 1 meter (3.3 feet) from the container, and the transport vehicle dimensions and weight limits. In general, the various wastes were assumed to be transported on standard truck semi-trailers and railcars in a single stack.

Waste materials to be transported offsite for disposal were classified into three broad disposal groupings: construction and demolition debris, hazardous wastes, and radioactive wastes. Trash, such as waste paper generated from routine office work, is not included. Radioactive wastes were classified in accordance with NRC regulations at 10 CFR Part 61. For DOE radioactive waste to be transported to a DOE radioactive waste disposal site, (e.g., NTS), it was assumed that the wastes would meet the disposal facility's waste acceptance criteria. Wastes exceeding Class C limits that were buried in the NRC-licensed Disposal Area (NDA) and State-licensed Disposal Area (SDA) prior to establishment of the West Valley Demonstration Project (WVDP) were assumed to be Greater-Than-Class C wastes. This waste includes the irradiated, unprocessed reactor fuels that were mixed with concrete in drums and disposed of at NDA. All other wastes exceeding Class C limits were assumed to be transuranic wastes.

For the purposes of analysis, this EIS assumes that all DOE low-level radioactive waste can be disposed of at NTS or EnergySolutions, in Clive, Utah, depending on waste classification. It also assumes that low-level radioactive waste from the SDA, and pre-1982 NDA waste, would be disposed of at a commercial disposal site.

⁴ *Transport Index is a dimensionless number (rounded up to the next tenth) placed on label of a package, to designate the degree of control to be exercised by the carrier. Its value is equivalent to the maximum radiation level in millirem per hour at 1 meter (3.3 feet) from the package (10 CFR 71.4 and 49 CFR 173.403).*

Table J-2 Waste Type and Container Characteristics

Waste Type	Container	Container Volume (cubic meters) ^a	Container Mass (kilograms) ^b	Number of Containers per Shipment
Class A low-level radioactive waste	208-liter drum	0.21	399	80 per truck 160 per rail
Class A low-level radioactive waste and mixed low-level radioactive waste	B-25 Box	2.55	4,536	5 per truck 10 per rail
Class B and Class C low-level radioactive waste	B-25 Box	2.55	4,536	5 per truck 10 per rail
Class B and Class C low-level radioactive waste	High-integrity container ^c	5.10	9,072	1 per truck 2 per rail
Class C (remote-handled) ^d	208-liter drum	0.21	399	10 per truck cask 2 casks per rail
Greater-Than-Class C waste ^d	208-liter drum	0.21	399	10 per truck cask 2 casks per rail
Low specific activity waste	Lift liner	7.31	10,886	2 per truck 4 per rail
Transuranic waste (remote-handled) ^e	208-liter drum	0.21	399	3 per truck cask 2 casks per rail
Transuranic waste (contact-handled)	208-liter drum	0.21	399	14 per TRUPACT II; 3 TRUPACT IIs per truck 6 TRUPACT IIs per rail
Construction/demolition debris	Roll-on/Roll-off	15.30	NA	1 per truck
Hazardous	208-liter drum	0.21	399	40 per truck

^a Container exterior volume. To convert from cubic meters to cubic feet, multiply by 35.315; from liters to gallons, by 0.26417.

^b Filled container maximum mass. Container mass includes the mass of the container shell, its internal packaging, and the materials within. To convert from kilograms to pounds, multiply by 2.2046.

^c High-integrity containers (NUHIC-205) would be transported in a shielded cask, if needed to limit the external dose rate.

^d Remote-handled Class C and Greater-Than-Class C waste drums are transported in Type B shipping casks. The Greater-Than-Class C waste includes fuel and hardware wastes buried in the NRC-licensed Disposal Area. Class B wastes packaged in drums, are assumed to be transported using shielded cask.

^e Remote-handled transuranic waste drums must be transported in a Type B cask.

Note: Construction debris and hazardous wastes would be shipped to a local offsite location by truck only.

The commercial sites considered include EnergySolutions for low specific activity and Class A waste, and the Chem-Nuclear Facility in Barnwell or a hypothetical Western site for Class B and Class C waste.

It is also expected that Greater-Than-Class C waste would be generated during the exhumation and closure of the SDA and the pre-WVDP burial areas in the NDA. There is no known disposal facility for this waste at the present time. A disposal facility for Greater-Than-Class C low-level radioactive waste and potential non-defense transuranic waste will be determined through the *Disposal of Greater-Than-Class C Low-Level Radioactive Waste Environmental Impact Statement (GTCC EIS)* (DOE/EIS-0375). However, for the purposes of analyses in this EIS, it was assumed that Greater-Than-Class C waste could be disposed at Yucca Mountain geological repository. In addition to Yucca Mountain, the *GTCC EIS* will evaluate several other DOE sites and generic commercial locations for the disposal of Greater-Than-Class C waste.

Transuranic and Class A mixed low-level radioactive waste would also be generated during closure activities. Class A mixed low-level radioactive waste is assumed to be disposed of at EnergySolutions under all disposal options. The only disposal location currently approved for transuranic waste is WIPP. WIPP is currently authorized to accept only DOE defense waste, and the *Waste Isolation Pilot Plant Disposal Phase Final Supplemental Environmental Impact Statement (WIPP SEIS)* (DOE 1997) evaluated disposal of

WVDP transuranic waste. However, DOE is not currently authorized to dispose of WVDP non-defense transuranic waste at WIPP. As stated above, a disposal facility for Greater-Than-Class C low-level radioactive waste and potential non-defense transuranic waste would be determined through the Record of Decision for the *Disposal of Greater-Than-Class C Low-Level Radioactive Waste Environmental Impact Statement* (DOE/EIS-0375). Nevertheless, for the purposes of analysis only, in this EIS the generated transuranic waste was assumed to be disposed of at WIPP.

J.4.3 Radionuclide Inventories

The details on the volumes and types of generated wastes and potential radioactive inventories at each of the Waste Management Areas (WMAs) are provided in the technical reports and their supporting documents for each of the alternatives (WSMS 2008a, 2008b, 2008c, 2008d), and are summarized in Appendix C of this EIS. As indicated in Appendix C and the related referenced documents, the activities under each alternative would include closure (excavation) or remediation of 12 WMAs, the Cesium Prong, and North Plateau Groundwater Plume; decontamination, demolition, decommissioning of buildings and underground structures; and construction, operation, and demolition of additional support facilities. These activities would result in multiple waste volumes of similar waste class with different radioactive inventories. Among the WMAs, the three largest radionuclide inventories are in the buried waste or equipment in the NDA, SDA, and Waste Tank Farm. Therefore, for the purposes of evaluating transportation accidents, the radionuclide inventories in various waste classes were estimated from radionuclide inventories in these three areas (URS 2000, 2002; WVNS 2005). The radionuclide inventory estimates at these areas were converted to radionuclide concentrations in each waste class based on the estimated disposed waste volumes in the NDA and SDA area, and the expected waste volumes in the Waste Tank Farm. The use of disposed volume would lead to a higher calculated radionuclide concentration than would be expected using that of retrieved volume. The waste retrieval process would lead to a higher waste volume due to cross contamination of the soil around the disposed waste. For similar waste classes with different radionuclide concentrations, the maximum radionuclide concentrations were selected to lead to the greatest radiological hazards for transportation risk assessment. The selected radionuclide concentrations were assumed to represent the concentrations for all similar waste classes that could be generated in other waste management areas. This method was deemed necessary to eliminate producing multiple radionuclide concentrations for the same waste class and to produce an enveloping set of transportation accident risks.

Tables J-3 and **J-4** provide the container radionuclide inventories for each waste class. The list of radionuclides in these tables is limited to those that in sum contribute more than 99 percent of the total dose in an accident. Given the list, the corresponding concentration is derived from waste inventory. Note that values given represent the maximum concentration that could be present in a container. If the actual waste container inventory were to exceed the A₂ limit (10 CFR Part 71 or 49 CFR 173.435), the waste class would be shipped in a Type B cask. Since Class B and Class C wastes could be shipped to a disposal site on the same type of transporter, a conservative inventory applicable to both waste class types was selected and provided in Table J-3. In the absence of a precise waste characterization for the low specific activity waste, the inventory for low specific activity waste was assumed to correspond to a low specific activity waste with the maximum concentration that was disposed of at the SDA.

Table J-3 Low Specific Activity, Class A, B, C and Greater-Than-Class C Waste Container Inventories (curies)

Nuclides	Low Specific Activity	Class A LLW		Class B and Class C LLW		GTCC
	Lift liner ^a	Drum	Box ^b	Box	HIC	Drum
Hydrogen-3	2.84×10^{-2}	1.14×10^{-2}	1.24×10^{-1}	3.72×10^1	7.35×10^1	2.00
Carbon-14	1.63×10^{-3}	8.44×10^{-5}	9.18×10^{-4}	2.76×10^{-1}	5.45×10^{-1}	1.48×10^{-2}
Iron-55	–	5.12×10^{-5}	5.57×10^{-4}	1.67×10^{-1}	3.30×10^{-1}	8.98×10^{-3}
Cobalt-60	3.10×10^{-3}	1.47×10^{-3}	1.60×10^{-2}	4.80	9.49	2.58×10^{-1}
Nickel-63	–	5.69×10^{-3}	6.20×10^{-2}	1.86×10^1	3.67×10^1	9.99×10^{-1}
Strontium-90	9.20×10^{-4}	4.12×10^{-4}	4.49×10^{-3}	2.04×10^{-1}	4.03×10^{-1}	1.85
Yttrium-90	9.20×10^{-4}	4.12×10^{-4}	4.49×10^{-3}	2.04×10^{-1}	4.03×10^{-1}	1.85
Cesium-137	1.52×10^{-3}	4.03×10^{-3}	4.39×10^{-2}	1.32×10^1	2.60×10^1	2.35
Barium-137m	1.44×10^{-3}	3.81×10^{-3}	4.15×10^{-2}	1.25×10^1	2.46×10^1	2.23
Thorium-234	–	5.29×10^{-5}	5.76×10^{-4}	1.73×10^{-1}	3.41×10^{-1}	2.68×10^{-2}
Uranium-238	–	5.29×10^{-5}	5.76×10^{-4}	1.73×10^{-1}	3.41×10^{-1}	9.28×10^{-3}
Plutonium-238 ^c	1.10×10^{-6}	3.09×10^{-5}	3.37×10^{-4}	1.01×10^{-1}	2.00×10^{-1}	2.67
Plutonium-239 ^c	1.10×10^{-6}	5.08×10^{-5}	5.53×10^{-4}	1.66×10^{-1}	3.28×10^{-1}	3.63×10^{-2}
Plutonium-240 ^c	1.10×10^{-6}	3.02×10^{-5}	3.28×10^{-4}	9.85×10^{-2}	1.95×10^{-1}	1.88×10^{-1}
Plutonium-241 ^c	1.10×10^{-6}	1.07×10^{-3}	1.17×10^{-2}	3.50	6.91	1.05
Americium-241	1.10×10^{-6}	1.21×10^{-4}	1.32×10^{-3}	3.95×10^{-1}	7.80×10^{-1}	1.16×10^{-1}

GTCC = Greater-Than-Class C waste, HIC = high integrity container, LLW = low-level radioactive waste.

^a The values are curies per cubic meter.

^b Also used for mixed low-level radioactive waste.

^c These nuclides were added to the low specific activity waste using similar concentration as that for Americium-241.

Table J-4 Fuel and Hardware, Remote-Handled Class C and Transuranic Container Inventories (curies)

Nuclides	Fuel/ Hardware	Class C-R	TRU	Nuclides	Fuel/ Hardware	Class C-R	TRU
Hydrogen-3	3.11	–	–	Neptunium-237	7.94×10^{-3}	2.79×10^{-5}	6.64×10^{-4}
Carbon-14	4.75×10^{-1}	1.42×10^{-6}	1.60×10^{-6}	Uranium-238	1.31×10^{-1}	2.85×10^{-5}	8.93×10^{-6}
Cobalt-60	2.73×10^1	–	–	Plutonium-238	1.05×10^1	4.01×10^{-3}	1.83×10^{-1}
Strontium-90	1.33×10^3	2.16	4.93×10^1	Plutonium-239	4.12×10^1	7.59×10^{-4}	4.58×10^{-2}
Yttrium-90	1.33×10^3	2.16	4.93×10^1	Plutonium-240	2.21×10^1	5.46×10^{-4}	3.32×10^{-2}
Cesium-137	1.73×10^3	6.40×10^2	8.82×10^1	Plutonium-241	6.71×10^2	4.51×10^{-2}	9.85×10^{-1}
Barium-137m	1.64×10^3	6.05×10^2	8.34×10^1	Americium-241	7.99×10^1	1.15×10^{-2}	4.81×10^{-1}
				Curium-244	6.26×10^{-1}	2.02×10^{-3}	9.97×10^{-2}

Class C-R = Class C remote-handled waste, TRU = transuranic waste.

The inventories refer to the amount of curies in a 208-liter (55-gallon) drum.

J.5 Incident-free Transportation Risks

J.5.1 Radiological Risk

During incident-free transportation of radioactive materials, radiological dose results from exposure to the external radiation field that surrounds the shipping containers. The population dose is a function of the number of people exposed, their proximity to the containers, their length of time of exposure, and the intensity of the radiation field surrounding the containers.

Radiological impacts were determined for crew members and the general population during incident-free transportation. For truck shipments, the crew members are the drivers of the shipment vehicle. For rail shipments, the crew consists of workers in close proximity to the shipping containers during inspection or classification of railcars. The general population is composed of the persons residing within 800 meters (0.50 miles) of the truck or rail routes (off-link), persons sharing the road or railway (on-link), and persons at stops. Exposures to workers who would load and unload the shipments are not included in this analysis, but are included in the occupational estimates for plant workers. Exposures to the inspectors and escorts are evaluated and presented separately.

Collective doses for the crew and general population were calculated by using the RADTRAN 5 computer code (Neuhauser and Kanipe 2003). The radioactive material shipments were assigned an external dose rate based on their radiological characteristics. Offsite transportation of the radioactive material has a defined regulatory limit of 10 millirem per hour at 2 meters (about 6.6 feet) from the cask (10 CFR 71.47 and 49 CFR 173.441). If a waste container shows a high external dose rate that could exceed the DOT limit of 10 millirem per hour at 2 meters (6.6 feet) from the outer, or lateral, edge of the vehicle, it would be transported in a Type A or Type B shielded shipping container. Waste container dose rate, or its Transport Index, is dependent on distribution and quantities of radionuclides, waste density, shielding provided by the packaging, and self-shielding provided by the waste mixture. The most important gamma-emitting radionuclides in the waste are cobalt-60 and cesium-137. The MicroShield computer program (Grove 2003) was used to estimate the external dose rates for the various waste containers based on the unit concentrations of cobalt-60 and cesium-137. Dose rate calculations were performed assuming both shielded and bare containers. For the shielded option, waste containers were assumed to be in appropriate Type A or Type B shipping containers. For example, Greater-Than-Class C and remote-handled transuranic wastes were assumed to be shipped in a CNS 10-160B or a RH-72B cask (both are Type B casks), and Class C remote-handled waste in a CNS 10-160B cask. Using an enveloping waste composition (i.e., wastes with the highest potential cobalt-60 and/or cesium-137 concentrations) for each waste type, a conservative dose rate for its container was calculated. These dose rates were compared with those used in other DOE NEPA documentation, and an appropriate conservative value was assigned to each waste type. Dose rates for Class A low-level radioactive waste and mixed low-level radioactive waste were assigned at 2 millirem per hour at 1 meter (about 3.3 feet). Dose rate for low specific activity waste was assigned at 0.10 millirem per hour at 1 meter. Dose rate for the remote-handled Class C and Greater-Than-Class C wastes in Type B casks were assigned at 16 millirem per hour at 1 meter. Dose rates for the contact handled Class B and Class C wastes in unshielded B-25 boxes or high integrity containers were also assigned at 16 millirem per hour at 1 meter. The dose rate for the remote-handled transuranic waste in a CNS 10-160B package at 1 meter was assigned at 5 millirem per hour. The dose rate for the contact-handled transuranic⁵ waste was assigned at 4 millirem per hour at 1 meter (DOE 1997). In all cases, the maximum external dose rate is less than the regulatory limit of 10 millirem per hour at 2 meters from each container.

To calculate the collective dose, a unit risk factor was developed to estimate the impact of transporting one shipment of radioactive material over a unit distance of travel in a given population density zone. The unit risk factors were combined with routing information, such as the shipment distances in various population density zones, to determine the risk for a single shipment (a shipment risk factor) between a given origin and destination. Unit risk factors were developed on the basis of travel on interstate highways and freeways, as required by 49 CFR Part 171 to 177 for highway-route-controlled quantities of radioactive material within rural, suburban, and urban population zones by using RADTRAN 5 and its default data. In addition, the analysis assumed that 10 percent of the time travel through suburban and urban zones would encounter rush-hour conditions, leading to lower average speed and higher traffic density. The unit risk factors for a Transport Index of 1 (i.e., dose rate of 1 millirem per hour at 1 meter [3.3 feet]) from the surface of the

⁵ Note that no contact-handled transuranic waste was identified, however, this dose rate was given for completeness.

shipping container, or the conveyance, for truck and rail shipments are summarized in **Table J-5**. Note that the size of the waste package and assumptions regarding public shielding afforded by its general housing structure within each zone would be major contributing factors in the calculated dose.

Table J-5 Incident-free Unit Risk Factors for a Dose Rate of 1 Millirem per Hour at 1 Meter from the Shipping Container for Truck and Rail Shipments

Mode	Exposure Group	Unit Risk Factors ^a		
		Rural	Suburban ^b	Urban ^b
Truck	Occupational ^c (person-rem per kilometer)	5.33×10^{-6}	5.86×10^{-6}	5.86×10^{-6}
	General Population			
	Off-link ^d (person-rem per kilometer per person per square kilometer)	2.62×10^{-9}	2.50×10^{-9}	5.18×10^{-11}
	On-link ^e (person-rem per kilometer)	7.21×10^{-7}	1.79×10^{-6}	5.66×10^{-6}
	Stops ^f (person-rem per kilometer per person per square kilometer)	2.30×10^{-10}	2.30×10^{-10}	2.30×10^{-10}
	Escorts ^g (person-rem per kilometer)	2.42×10^{-7}	2.55×10^{-7}	2.55×10^{-7}
Rail	Occupational ^h (person-rem per kilometer)	2.10×10^{-7}	2.10×10^{-7}	2.10×10^{-7}
	General Population			
	Off-link ^d (person-rem per kilometer per person per square kilometer)	3.52×10^{-9}	4.90×10^{-9}	1.69×10^{-10}
	On-link ^e (person-rem per kilometer)	8.23×10^{-9}	1.06×10^{-7}	2.94×10^{-7}
	Stops ^f (person-rem per kilometer per person per square kilometer)	8.10×10^{-10}	8.10×10^{-10}	8.10×10^{-10}
	Escorts ⁱ (person-rem per kilometer)	1.57×10^{-6}	2.52×10^{-6}	4.21×10^{-6}

^a The methodology, equations, and data used to develop the unit risk factors are discussed in the *RADTRAN 5 User Manual* (Neuhauser and Kanipe 2003). The risk factors provided here are for a truck and rail cask with the following characteristic length and diameters: 5.2-meter (17.06-foot) length and 1.0-meter (3.28-foot) diameter for a truck cask, and 5.06-meter (16.6-foot) length and 2.0-meter (6.56-foot) diameter for a rail cask. Because the characteristics of transuranic waste shipment are different from those used here, the contact-handled transuranic shipment risk factors would be higher than the values given here by a factor of 1.387 and 1.756 for the population dose and crew dose, respectively.

^b Ten percent of travel within these zones encounters rush-hour traffic with a higher traffic density and a lower speed.

^c Maximum dose in the truck cabin (crew dose) is 2 millirem per hour, per 10 CFR 71.47, unless the crew member is a trained radiation worker, which would administratively limit the annual dose to 2 rem per year (DOE Administrative Control, DOE-STD-1098-99 [DOE 1999]).

^d Off-link general population refers to persons within 800 meters (0.50 miles) of the transportation route. The difference in doses between the rural, suburban, and urban populations is due to the assumptions regarding public shielding afforded by its general housing structure within each zone.

^e On-link general population refers to persons sharing the transportation route.

^f Dose to residents from frequent stops along the routes.

^g Escorts (two persons) in a vehicle that follows or leads the truck by 60 meters (about 200 feet). The dose to this vehicle is estimated to be 0.15 millirem per hour for a cask at the regulatory dose limit (i.e., 10 millirem per hour at 2 meters), (DOE 2002a).

^h Need to add the nonlinear component of incident-free rail dose for crew members because of railcar inspections and classifications, which is 0.000233 person-rem per shipment. *RADTRAN 5 Technical Manual*, Appendix B (Neuhauser et al. 2000), contains an explanation of the rail exposure model.

ⁱ Escorts (two persons) at a distance of 30 meters (about 100 feet) from the end of the shipping cask. The dose to the escort is estimated to be 0.71 millirem per hour for a cask at the regulatory dose limit (DOE 2002a).

Note: To convert from meters to feet, multiply by 3.281.

The radiological risks from transporting the waste are estimated in terms of the number of LCFs among the crew and the exposed population. A health risk conversion factor of 0.0006 LCFs per person-rem of exposure was used for both the public and workers (DOE 2003a).

J.5.2 Nonradiological Risk

The nonradiological risks, or vehicle-related health risks, resulting from incident-free transport may be associated with the generation of air pollutants by transport vehicles during shipment and are independent of the radioactive nature of the shipment. The health endpoint assessed under incident-free transport conditions is the excess latent mortality due to inhalation of vehicle emissions. Unit risk factors for pollutant inhalation in terms of mortality have been generated (Rao et al. 1982), however, the emergence of considerable data regarding threshold values for various chemical constituents of vehicle exhaust has made linear extrapolation to estimate the risks from vehicle/rail emissions untenable (Neuhauser et al. 2000). This calculation has been dropped from RADTRAN in its recent revision (Neuhauser and Kanipe 2003). Therefore, no risk factors have been assigned to the vehicle emissions in this EIS.

J.5.3 Maximally Exposed Individual Exposure Scenarios

The maximum individual doses for routine offsite transportation were estimated for transportation workers, as well as for members of the general population.

For truck shipments, three hypothetical scenarios were evaluated to determine the MEI in the general population. These scenarios are (DOE 2002a):

- A person caught in traffic and located 1.2 meters (4 feet) from the surface of the shipping container for 30 minutes;
- A resident living 30 meters (98 feet) from the highway used to transport the shipping container; and
- A service station worker at a distance of 16 meters (52 feet) from the shipping container for 50 minutes.

The hypothetical MEI doses were accumulated over a single year for all transportation shipments. However, for the scenario involving an individual caught in traffic next to a shipping container, the radiological exposures were calculated for only one event because it was considered unlikely that the same individual would be caught in traffic next to all containers for all shipments. For truck shipments, the maximally exposed transportation worker is the driver who was assumed to have been trained as a radiation worker and to drive shipments for up to 2,000 hours per year, or accumulate an exposure of 2 rem per year. A member of the truck crew would be a non-radiation worker; the maximum annual dose rate for a non-radiation worker is 100 millirem (10 CFR 20.1301).

Three hypothetical scenarios were also evaluated for railcar shipments. They are:

- A rail yard worker working at a distance of 10 meters (33 feet) from the shipping container for 2 hours;
- A resident living 30 meters (98 feet) from the rail line where the shipping container was being transported; and
- A resident living 200 meters (656 feet) from a rail stop during classification and inspection for 20 hours.

For rail shipments, the maximally exposed transportation worker is an individual inspecting the cargo at 1 meter (3.3 feet) from the shipping container for 1 hour.

J.6 Transportation Accident Risks

J.6.1 Methodology

The offsite transportation accident analysis considers the impact of accidents during the transportation of waste by truck or rail. Under accident conditions, impacts on human health and the environment could result from the release and dispersal of radioactive material. Transportation accident impacts were assessed using an accident analysis methodology developed by NRC. This section provides an overview of the methodologies; detailed descriptions of various methodologies are found in the *Radioactive Material Transportation Study*, NUREG-0170, *Modal Study*, NUREG/CR-4829, and *Reexamination Study*, NUREG/CR-6672 (NRC 1977, 1987, 2000). Accidents that could potentially breach the shipping container are represented by a spectrum of accident severities and radioactive release conditions. Historically, most transportation accidents involving radioactive materials have resulted in little or no release of radioactive material from the shipping container. Consequently, the analysis of accident risks takes into account a spectrum of accidents ranging from high-probability accidents of low severity to hypothetical high-severity accidents that have a correspondingly low probability of occurrence. The accident analysis calculates the probabilities and consequences from this spectrum of accidents.

To provide DOE and the public with a reasonable assessment of radioactive waste transportation accident impacts, two types of analysis were performed. First an accident risk assessment was performed that takes into account the probabilities and consequences of a spectrum of potential accident severities using a methodology developed by the NRC (NRC 1977, 1987, 2000). For the spectrum of accidents considered in the analysis, accident consequences in terms of collective “dose risk” to the population within 80 kilometers (50 miles) were determined using the RADTRAN 5 computer program (Neuhauser et al. 2000). The RADTRAN 5 code sums the product of consequences and probability over all accident severity categories to obtain a probability-weighted risk value referred to in this appendix as “dose risk,” which is expressed in units of person-rem. Second, to represent the maximum reasonably foreseeable impacts to individuals and populations should an accident occur, maximum radiological consequences were calculated in an urban or suburban population zone for an accidental release with a likelihood of occurrence greater than 1-in-10 million per year using the RISKIND computer program (Yuan et al. 1995).

For accidents where a waste container or the cask shielding was undamaged, population and individual radiation exposure from the waste package was evaluated for the duration that would be needed to recover and resume shipment. The collective dose over all segments of transportation routes was evaluated for an affected population up to a distance of 800 meters (0.5 miles) from the accident location. This dose is an external dose, and is approximately inversely proportional to the square of the distance of the affected population from accident. Any additional dose to those residing beyond 800 meters (0.5 miles) from the accident would be negligible. The dose to an individual (first responder) was calculated assuming that the individual would be located at 2 to 10 meters (6.6 to 33 feet) from the package. For the accidents leading to loss of cask shielding, a method similar to that provided in the *Reexamination Study* and adapted in the *Yucca Mountain EIS* was used (NRC 2000; DOE 2002b, 2008).

J.6.2 Accident Rates

For the calculation of accident risks, vehicle accident and fatality rates were taken from data provided in *State-Level Accident Rates for Surface Freight Transportation: A Reexamination*, ANL/ESD/TM-150 (Saricks and Tompkins 1999). Accident rates are generically defined as the number of accident involvements (or fatalities) in a given year per unit of travel in that same year. Therefore, the rate is a fractional value, with accident involvement count as the numerator of the fraction and vehicular activity (total travel distance in truck kilometers) as its denominator. Accident rates were generally determined for a multi-year period. For

assessment purposes, the total number of expected accidents or fatalities was calculated by multiplying the total shipment distance for a specific case by the appropriate accident or fatality rate.

For truck transportation, the rates presented are specifically for heavy-haul combination trucks involved in interstate commerce (Saricks and Tompkins 1999). Heavy-haul combination trucks are rigs composed of a separable tractor unit containing the engine and one to three freight trailers connected to each other. Heavy-haul combination trucks are typically used for radioactive material shipments. Truck accident rates were computed for each state based on statistics compiled by the Federal Highway Administration, Office of Motor Carriers, from 1994 to 1996. A fatality caused by an accident is the death of a member of the public who is killed instantly or dies within 30 days due to the injuries sustained in the accident.

For offsite truck transportation, separate accident rates and accident fatality risks were used for rural, suburban, and urban population zones. The values selected were the “mean” accident and fatality rates given in ANL/ESD/TM-150 (Saricks and Tompkins 1999) under interstate, primary, and total categories for rural, suburban, and urban population zones, respectively. The accident rates were 3.15, 3.52, and 3.66 per 10 million truck kilometers, and the fatality rates were 0.88, 1.49, and 2.32 per 100 million truck kilometers for rural, suburban, and urban zones, respectively. For rail transportation, the accident and fatality rates were the mean value rates applicable to all population zones. The rates used in this analysis were 2.74 accidents per 10 million railcar kilometers and 7.82 fatalities per 100 million railcar kilometers.

For local and regional transport, New York State accident and fatality rates were used. The data were provided in ANL/ESD/TM-150 (Saricks and Tompkins 1999). The rates used were 3.45 accidents per 10 million truck kilometers and 1.24 fatalities per 100 million truck kilometers.

J.6.3 Accident Severity Categories and Conditional Probabilities

Accident severity categories for potential radioactive waste transportation accidents are described in the *Radioactive Material Transportation Study* (NRC 1977) for radioactive waste in general, the *Modal Study* (NRC 1987), and the *Reexamination Study* (NRC 2000) for spent nuclear fuel. The methods described in the *Modal Study* and the *Reexamination Study* are applicable to transportation of radioactive materials in a Type B spent fuel cask. The accident severity categories presented in the *Radioactive Material Transportation Study* would be applicable to all other waste transported offsite.

The *Radioactive Material Transportation Study* (NRC 1977) originally was used to estimate conditional probabilities associated with accidents involving transportation of radioactive materials. The *Modal Study* and the *Reexamination Study* (NRC 1987, 2000) are initiatives taken by NRC to refine more precisely the analysis presented in *Radioactive Material Transportation Study* for spent nuclear fuel shipping casks.

Whereas the *Radioactive Material Transportation Study* (NRC 1977) analysis was primarily performed using best engineering judgments and presumptions concerning cask response, the later studies rely on sophisticated structural and thermal engineering analysis and a probabilistic assessment of the conditions that could be experienced in severe transportation accidents. The latter results are based on representative spent nuclear fuel casks assumed to have been designed, manufactured, operated, and maintained according to national codes and standards. Design parameters of the representative casks were chosen to meet the minimum test criteria specified in 10 CFR Part 71. The study is believed to provide realistic, yet conservative, results for radiological releases under transport accident conditions.

In the *Modal Study* and the *Reexamination Study*, potential accident damage to a cask is categorized according to the magnitude of the mechanical forces (impact) and thermal forces (fire) to which a cask may be subjected during an accident. Because all accidents can be described in these terms, severity is independent of the specific accident sequence. In other words, any sequence of events that results in an accident in which a cask

is subjected to forces within a certain range of values is assigned to the accident severity region associated with that range. The accident severity scheme is designed to take into account all potential foreseeable transportation accidents, including accidents with low probability but high consequences, and those with high probability but low consequences.

As discussed earlier, the accident consequence assessment considers the potential impacts of severe transportation accidents. In terms of risk, the severity of an accident must be viewed in terms of potential radiological consequences, which are directly proportional to the fraction of the radioactive material within a cask that is released to the environment during the accident. Although accident severity regions span the entire range of mechanical and thermal accident loads, they are grouped into accident categories that can be characterized by a single set of release fractions and are, therefore, considered together in the accident consequence assessment. The accident category severity fraction is the sum of all conditional probabilities in that accident category.

For the accident risk assessment, accident “dose risk” was generically defined as the product of the consequences of an accident and the probability of occurrence of that accident, an approach consistent with the methodology used by RADTRAN 5 computer code. The RADTRAN 5 code sums the product of consequences and probability over all accident categories to obtain a probability-weighted risk value referred to in this appendix as “dose risk,” which is expressed in units of person-rem.

J.6.4 Atmospheric Conditions

Because it is impossible to predict the specific location of an offsite transportation accident, generic atmospheric conditions were selected for the risk and consequence assessments. On the basis of observations from National Weather Service surface meteorological stations at over 177 locations in the United States, on an annual average, neutral conditions (Pasquill Stability Classes C and D) occur 58.5 percent of the time, and stable (Pasquill Stability Classes E, F, and G) and unstable (Pasquill Stability Classes A and B) conditions occur 33.5 percent and 8 percent of the time, respectively (DOE 2002a). The neutral weather conditions predominate in each season, but most frequently in the winter (nearly 60 percent of the observations).

Neutral weather conditions (Pasquill Stability Class D) compose the most frequently occurring atmospheric stability condition in the United States and are thus most likely to be present in the event of an accident involving a radioactive waste shipment. Neutral weather conditions are typified by moderate windspeeds, vertical mixing within the atmosphere, and good dispersion of atmospheric contaminants. Stable weather conditions are typified by low windspeeds, very little vertical mixing within the atmosphere, and poor dispersion of atmospheric contaminants. The atmospheric condition used in RADTRAN 5 is an average weather condition that corresponds to a stability class spread between Class D (for near distance) and Class E (for farther distance).

The accident consequences for the maximum reasonably foreseeable accident (an accident with likelihood of occurrence greater than 1 in 10 million per year) were assessed under both stable (Class F with a wind speed of 1 meter [3.3 feet] per second) and neutral (Class D with a wind speed of 4 meters [13 feet] per second) atmospheric conditions. The population dose is evaluated under neutral atmospheric conditions and the MEI dose under stable atmospheric conditions. The MEI dose would represent an accident under worst-case weather conditions (stable condition, with minimum diffusion and dilution). The population dose would represent an average weather condition.

J.6.5 Radioactive Release Characteristics

Radiological consequences were calculated by assigning radionuclide release fractions on the basis of the type of waste, the type of shipping container, and the accident severity category. The release fraction is defined as the fraction of the radioactivity in the container that could be released to the atmosphere in a given severity of accident. Release fractions vary according to waste type and the physical or chemical properties of the radioisotopes. Most solid radionuclides are nonvolatile and are, therefore, relatively nondispersible.

Representative release fractions were developed for each waste and container type on the basis of DOE and NRC reports (DOE 1994, 2002b, 2003a; NRC 1977, 2000). The severity categories and corresponding release fractions provided in these documents cover a range of accidents from no impact (zero speed) to impacts with speed in excess of 193 kilometers (120 miles) per hour onto an unyielding surface. Traffic accidents that could occur at the site would be of minor impact due to lower local speed, with no release potential.

For radioactive wastes transported in a Type B cask, the particulate release fractions were developed consistent with the models in the *Reexamination Study* (NRC 2000) and adapted in the *West Valley Demonstration Project Waste Management Environmental Impact Statement* (DOE 2003b). For wastes transported in Type A containers (e.g., 208-liter [55-gallon] drums and boxes), the fractions of radioactive material released from the shipping container were based on recommended values from *Radioactive Material Transportation Study* and *DOE Handbook on Airborne Release and Respirable Fractions* (NRC 1977, DOE 1994). For contact-handled and remote-handled transuranic waste, the release fractions corresponding to the *Radioactive Material Transportation Study* severity categories as adapted in the *WIPP SEIS* were used (DOE 1997, 2002b). For wastes transported in high integrity containers, and lift liners in intermodal (or Sealand) containers, release fractions were calculated using a method similar to that used in the *WIPP SEIS*.

For those accidents where the waste container or cask shielding were undamaged and no radioactive material released, it was assumed that it would take 12 hours to recover from the accident and resume shipment. During this period, no individual would remain close to the cask. A first responder could stay at a location 2 to 10 meters (6.6 to 33 feet) from the package, at a position where the dose rate would be the highest, for 30 minutes in a loss of shielding accident, and 1 hour for other accidents with no release (DOE 2002b).

J.6.6 Acts of Sabotage or Terrorism

In the aftermath of the tragic events of September 11, 2001, DOE is continuing to assess measures to minimize the risk or potential consequences of radiological sabotage. While it is not possible to determine terrorists' motives and targets with certainty, DOE considers the threat of terrorist attack to be real, and makes all efforts to reduce any vulnerability to this threat.

Nevertheless, DOE has evaluated the impacts of acts of sabotage and terrorism on transportation of spent nuclear fuel and high-level radioactive waste shipments (DOE 1996, 2002a). The spectrum of accidents considered ranges from direct attack on the cask from afar to hijacking and exploding the shipping cask in an urban area. Both of these actions would result in damaging the cask and its contents and releasing radioactive materials. The fraction of the materials released is dependent on the nature of the attack (type of explosive or weapon used). The sabotage event evaluated in the *Final Environmental Impact Statement for a Geologic Repository for the Disposal of Spent Nuclear Fuel and High-Level Radioactive Waste at Yucca Mountain, Nye County, Nevada (Yucca Mountain EIS)* was considered as the enveloping analysis for this EIS. The event was assumed to involve either a truck-sized, or a rail-sized cask containing light water reactor spent nuclear fuel. The consequences of such an act were calculated to result in an MEI dose (at 140 meters [460 feet]) of 40 to 110 rem for events involving rail-sized or truck-sized cask, respectively. These events would lead to an increase in risk of fatal cancer to the MEI by 2 to 7 percent (DOE 2002a). The quantity of radioactive

materials transported under all West Valley decommissioning alternatives considered here would be less than that considered in this analysis. Therefore, estimates of risk in the *Yucca Mountain EIS* envelop the risks from an act of sabotage or terrorism involving the radioactive material transported under all alternatives considered in this EIS.

J.7 Risk Analysis Results

Per-shipment risk factors have been calculated for the collective populations of exposed persons and for the crew for all anticipated routes and shipment configurations. Radiological risks are presented in doses per-shipment for each unique route, material, and container combination. Radiological risk factors per-shipment for incident-free transportation and accident conditions are presented in **Table J-6**. For incident-free transportation, both dose and LCF risk factors are provided for the crew and exposed population. The radiological risks would result from potential exposure of people to external radiation emanating from the packaged waste. The exposed population includes the off-link public (i.e., people living along the route), on-link public (i.e., pedestrian and car occupants along the route) and public at rest and fuel stops.

For transportation accidents, the risk factors are given for both the radiological, in terms of potential LCFs in the exposed population, and the nonradiological, in terms of number of traffic fatalities. LCFs represent the number of additional latent fatal cancers among the exposed population. Under accident conditions, the population would be exposed to radiation from released radioactivity if the package is damaged, and would receive direct dose if the package is unbreached. For the accidents with no release, the analysis conservatively assumed that it would take about 12 hours to remove the package and/or vehicle from the accident area (DOE 2002a). Accidents leading to loss of cask shielding would only be applicable to those shipments that use shielded casks, such as shipments of Greater-Than-Class C, remote-handled Class C, and remote-handled transuranic wastes.

As indicated in this table, all risk factors are less than one. This means that no LCF or traffic fatalities are expected to occur during each transport. For example, the risk factors to truck crew and population for transporting one shipment of Class B and Class C waste to Nevada Test Site are given as 3.79×10^{-4} and 1.19×10^{-4} LCFs. This risk can also be interpreted as meaning that there is a chance of 1 in 2,600 that an additional latent fatal cancer could be experienced among the exposed workers from exposure to radiation during one shipment of Class B and Class C waste to Nevada. Similarly, there is a chance of 1 in 8,400 that an additional latent fatal cancer could be experienced among the exposed population residing along the transport route. These are essentially equivalent to zero risk. It should be noted that the maximum allowable dose rate in the truck cabin is less than or equal to 2 millirem per hour, and the maximum annual dose to a commercial truck driver is 100 millirem per year. Therefore an individual receiving a dose of 100 millirem would have an expected risk of developing a latent fatal cancer of 6.0×10^{-5} . The same individual is expected to receive a dose of about 360 millirem per year from background radiation.

Transportation risks were calculated assuming that wastes are transported using either all rail or all truck. DOE could decide to use a combination of both truck and rail for transporting wastes to any of the disposal site options. Shipments involving a combination of rail and truck for a specific shipment would involve workers who would transfer waste containers from railcars to trucks (or visa versa) at an intermodal station. Based on a study of total risk to workers and population from truck only transportation and a combination of truck-rail transportation (PNNL 1999), it is estimated that the total dose to workers and public for a combination of rail and truck shipment is less than would occur if the entire transportation occurred on truck. The accident and fatality rates are per truck-kilometer or railcar-kilometer.

Table J-6 Risk Factors per Shipment of Radioactive Waste

Waste Materials and Mode of Transport	Transport Destination	Incident-Free				Accident	
		Crew Dose (person-rem)	Crew Risk (LCF)	Population Dose (person rem)	Population Risk (LCF)	Radiological Risk (LCF)	Non- radiological Risk (traffic fatalities)
Truck Shipments							
Class A (B) ^a	Nevada Test Site	7.90×10^{-2}	4.75×10^{-5}	2.49×10^{-2}	1.49×10^{-5}	6.73×10^{-10}	8.18×10^{-5}
Class A (D) ^b		9.50×10^{-2}	5.70×10^{-5}	4.22×10^{-2}	2.53×10^{-5}	1.07×10^{-9}	8.18×10^{-5}
Class B and Class C ^c		6.32×10^{-1}	3.79×10^{-4}	1.99×10^{-1}	1.19×10^{-4}	1.15×10^{-7}	8.18×10^{-5}
Class C (RH) ^d		5.50×10^{-1}	3.30×10^{-4}	6.95×10^{-2}	4.17×10^{-5}	1.42×10^{-9}	8.18×10^{-5}
Low Specific Activity		4.35×10^{-3}	2.61×10^{-6}	8.69×10^{-4}	5.22×10^{-7}	2.15×10^{-10}	8.18×10^{-5}
GTCC ^{e, f}	Yucca Mountain ^f	3.44×10^{-2}	2.06×10^{-5}	4.34×10^{-3}	2.61×10^{-6}	2.85×10^{-9}	8.18×10^{-5}
GTCC ^{f, g}		3.21×10^{-1}	1.93×10^{-4}	9.02×10^{-2}	5.41×10^{-5}	6.82×10^{-9}	8.18×10^{-5}
Low Specific Activity	EnergySolutions	3.60×10^{-3}	2.16×10^{-6}	7.16×10^{-4}	4.30×10^{-7}	1.71×10^{-10}	6.79×10^{-5}
Class A (B) ^a	Barnwell	6.55×10^{-2}	3.93×10^{-5}	2.05×10^{-2}	1.23×10^{-5}	5.71×10^{-10}	6.79×10^{-5}
Class A (D) ^b		7.87×10^{-2}	4.72×10^{-5}	3.48×10^{-2}	2.09×10^{-5}	9.08×10^{-10}	6.79×10^{-5}
Class B and Class C ^h		3.49×10^{-1}	2.09×10^{-4}	2.04×10^{-2}	1.22×10^{-5}	6.19×10^{-7}	3.47×10^{-5}
Class C (RH) ^d	WIPP	2.14×10^{-1}	1.28×10^{-4}	2.75×10^{-2}	1.65×10^{-5}	1.20×10^{-9}	3.47×10^{-5}
RH-TRU ⁱ		1.39×10^{-1}	8.34×10^{-5}	2.14×10^{-2}	1.28×10^{-5}	7.82×10^{-10}	7.01×10^{-5}
Class B and Class C ^h	Hanford Site ^j	9.34×10^{-1}	5.61×10^{-4}	5.16×10^{-2}	3.09×10^{-5}	9.80×10^{-7}	8.44×10^{-5}
Class C (RH) ^d		5.73×10^{-1}	3.44×10^{-4}	7.15×10^{-2}	4.29×10^{-5}	1.38×10^{-9}	8.44×10^{-5}
Rail Shipments							
Class A (B) ^a	Nevada Test Site	6.71×10^{-3}	4.03×10^{-6}	1.09×10^{-2}	6.57×10^{-6}	9.67×10^{-10}	6.50×10^{-4}
Class A (D) ^b		6.06×10^{-3}	3.64×10^{-6}	8.94×10^{-3}	5.36×10^{-6}	1.10×10^{-9}	6.50×10^{-4}
Class B and Class C ^c		5.37×10^{-2}	3.22×10^{-5}	8.75×10^{-2}	5.25×10^{-5}	1.44×10^{-7}	6.50×10^{-4}
Class C (RH) ^d		3.89×10^{-2}	2.34×10^{-5}	4.59×10^{-2}	2.76×10^{-5}	3.74×10^{-9}	6.50×10^{-4}
Low Specific Activity		2.70×10^{-4}	1.62×10^{-7}	3.53×10^{-4}	2.12×10^{-7}	3.22×10^{-10}	6.50×10^{-4}
GTCC ^{e, f}	Yucca Mountain ^f	2.43×10^{-3}	1.46×10^{-6}	2.87×10^{-3}	1.72×10^{-6}	8.58×10^{-9}	6.50×10^{-4}
GTCC ^{f, g}		3.41×10^{-2}	2.04×10^{-5}	4.02×10^{-2}	2.41×10^{-5}	2.02×10^{-8}	6.50×10^{-4}
Low Specific Activity	EnergySolutions	2.28×10^{-4}	1.37×10^{-7}	3.48×10^{-4}	2.09×10^{-7}	3.19×10^{-10}	5.36×10^{-4}
Class A (B) ^a	Barnwell	5.67×10^{-3}	3.40×10^{-6}	1.08×10^{-2}	6.48×10^{-6}	9.53×10^{-10}	5.36×10^{-4}
Class A (D) ^b		5.12×10^{-3}	3.07×10^{-6}	8.82×10^{-3}	5.29×10^{-6}	1.09×10^{-9}	5.36×10^{-4}
Class B and Class C ^h		1.57×10^{-2}	9.44×10^{-6}	2.51×10^{-2}	1.51×10^{-5}	1.12×10^{-6}	2.79×10^{-4}
Class C (RH) ^d	WIPP	1.93×10^{-2}	1.16×10^{-5}	3.79×10^{-2}	2.27×10^{-5}	3.71×10^{-9}	2.79×10^{-4}
RH-TRU		9.08×10^{-3}	5.45×10^{-6}	1.30×10^{-2}	7.80×10^{-6}	1.11×10^{-9}	4.63×10^{-4}
Class B and Class C ^h	Hanford Site ⁱ	3.19×10^{-2}	1.92×10^{-5}	3.20×10^{-2}	1.92×10^{-5}	1.68×10^{-6}	6.56×10^{-4}
Class C (RH) ^d		3.92×10^{-2}	2.35×10^{-5}	4.83×10^{-2}	2.90×10^{-5}	3.95×10^{-9}	6.56×10^{-4}

CH = contact-handled, LCF = latent cancer fatality, RH = remote-handled, TRU = transuranic waste, WIPP = Waste Isolation Pilot Plant, GTCC = Greater-Than-Class C waste, NA = not analyzed.

^a Class A low-level radioactive waste transported in Type A B-25 boxes.

^b Class A low-level radioactive waste transported in 208-liter (55-gallon) drums.

^c Class B and Class C wastes are transported to Nevada Test Site in Type A B-25 boxes. Since these wastes have similar external dose rate and could be transported on the same truck or rail, a single radiological accident risk factor that maximizes the hazards is provided.

^d Class C Remote-handled Class C wastes are transported in 208-liter (55-gallon) drums.

^e Greater-Than-Class C waste from contaminations other than those of fuel and hardware stated below.

^f For purposes of analysis only, Greater-Than-Class C wastes were assumed to be shipped to Yucca Mountain, although there is no disposal site for these wastes at this time. A disposal facility for Greater-Than-Class C low-level radioactive waste and potential non-defense transuranic waste will be determined through the *Disposal of Greater-Than-Class C Low-Level Radioactive Waste Environmental Impact Statement* (DOE/EIS-0375).

^g Greater-Than-Class C waste includes the unprocessed irradiated fuel and the hulls and hardware from the processed fuel.

^h Class B and Class C low-level radioactive wastes are transported to this site in high-integrity containers.

ⁱ This site is used a proxy for shipment of commercial Class B and Class C wastes to a Western U.S. disposal facility.

Table J-7 provides the estimated number of shipments for various wastes under all alternatives and waste disposal site options. The shipment numbers were calculated using the estimated waste volumes for each waste type as given in Appendix C and summarized in Section 4.1.7 of the EIS, and the waste container and shipment characteristics provided in Table J-2. The shipment numbers are for truck transport of various wastes for the DOE/Commercial Disposal Option (where DOE wastes are disposed of at DOE facilities and commercial wastes are sent to commercial facilities) and the Commercial Disposal Option (where only commercial disposal options are assumed). Some of the wastes would be sent to the commercial sites (both EnergySolutions and Barnwell, or a western U.S. disposal location), irrespective of the disposal site option considered. In the commercial disposal site option, there is no disposition for transuranic and Greater-Than-Class C wastes; no commercial disposal sites are available for these wastes. As explained earlier, a disposal facility for Greater-Than-Class C low-level radioactive waste and potential non-defense transuranic waste would be determined through the Record of Decision for the *Disposal of Greater-Than-Class C Low-Level Radioactive Waste Environmental Impact Statement* (DOE/EIS-0375). However, for purposes of analysis only, in this EIS, it was assumed that these wastes would be transported to WIPP and Yucca Mountain, respectively.

Both the radiological dose risk factor and nonradiological risk factor for transportation accidents are presented in Table J-6. The radiological and nonradiological accident risk factors are provided in terms of potential fatalities per shipment. The radiological risks are in terms of LCFs. For the population, the radiological risks were calculated by multiplying the accident dose risks by the health risk factor of 6×10^{-4} cancer fatalities per person-rem of exposure. The nonradiological risk factors are nonoccupational traffic fatalities resulting from transportation accidents.

As stated earlier (see Section J.6.3), the accident dose is called “dose risk” because the values incorporate the spectrum of accident severity probabilities and associated consequences (e.g., dose). The accident dose risks are very low because accident severity probabilities (i.e., the likelihood of accidents leading to confinement breach of a package or shipping cask and release of its contents) are small, and the content and form of the wastes (solid dirt-like contamination) are such that would lead to nondispersible and mostly noncombustible release. Although persons are residing in an 80-kilometer (50-mile) radius along the transportation route, they are generally quite far from the route. Because RADTRAN 5 uses an assumption of homogeneous population, it would greatly overestimate the actual doses.

Table J-8 shows the risks of transporting radioactive waste under each alternative. In this table, Barnwell is used as a disposal location for commercial Class B and Class C wastes. **Table J-9** shows the risks of transporting radioactive wastes under each alternative considering a Western U.S. disposal site. This assumption was made to maximize the transportation risks, in light of the uncertainties in waste acceptance at Barnwell, South Carolina, after calendar year 2008. The risks are calculated by multiplying the previously given per-shipment factors by the number of shipments over the duration of the program and, for radiological doses, by the health risk conversion factors. The risks are for the total offsite transport of the radioactive wastes over the entire period under each alternative. As indicated in Chapter 2 of this EIS, there is a large variation in the duration of alternatives ranging from about 10 years (Sitewide Close-In-Place and Phased Decisionmaking Alternatives) to about 60 years (Sitewide Removal Alternative). Review of the sequence of activities under each alternative indicates that except for the Sitewide Removal Alternative where the activities would constantly generate waste requiring offsite transport over a period of about 60 years, the duration of intensive waste generating activities under other alternatives would be less than or equal to 10 years. These activities would occur at the beginning of implementation of the alternatives.

Table J-7 Estimated Number of Truck Shipments Under Each Alternative

<i>Number of Shipments</i>					
DOE/Commercial Disposal Option					
<i>Waste Types</i>	<i>Assumed Disposal Location</i>	<i>Removal Alternative</i>	<i>Close-In-Place Alternative</i>	<i>Phased Decisionmaking Alternative</i>	<i>No Action Alternativeⁱ</i>
LSA	NTS/EnergySolutions ^j	93,270	839	10,526	155
Class A ^a	NTS/EnergySolutions ^j	8,382	299	1,472	581
Class A ^b	NTS/EnergySolutions ^j	49	5	28	2
Class B and C ^c	NTS/Commercial ^j	924	0	79	0
Class C-RH ^d	NTS/Commercial ^j	125	35	22	0
Mixed LLW	EnergySolutions	40	28	3	1
GTCC ^e	Yucca	2,357	0	0	0
Transuranic ^f	WIPP	479	19	337	0
Hazardous ^g	Local	3	1	1	3
Other ^h	Local	7,801	1,014	2,315	53
Commercial Disposal Option					
<i>Waste Types</i>	<i>Assumed Disposal Location</i>	<i>Removal Alternative</i>	<i>Close-In-Place Alternative</i>	<i>Phased Decisionmaking Alternative</i>	<i>No Action Alternativeⁱ</i>
LSA	EnergySolutions	93,270	839	10,526	155
Class A ^a	EnergySolutions	8,382	299	1,472	581
Class A ^b	EnergySolutions	49	5	28	2
Class B and C ^c	Commercial	1,075	0	221	0
Class C-RH ^d	Commercial	125	35	22	0
Mixed LLW	EnergySolutions	40	28	3	1
GTCC ^e	Yucca	2,357	0	0	0
Transuranic ^f	WIPP	479	19	337	0
Hazardous ^g	Local	3	1	1	3
Other ^h	Local	7,801	1,014	2,315	53

LLW = low-level radioactive waste, RH = remote-handled, GTCC = Greater-Than-Class C waste, NTS = Nevada Test Site.

^a Class A low-level radioactive waste transported in Type A B-25 boxes.

^b Class A low-level radioactive waste transported in 208-liter (55-gallon) drums.

^c Class B and Class C contact-handled wastes are packaged in either high-integrity containers for transport to a Western United States site (for purposes of analysis only), or Type A B-25 boxes for transport to the Hanford Site or NTS.

^d Class C remote-handled wastes packaged in drums or high-integrity containers and transported in Type B casks. Class-B wastes packaged in drums are also transported in Type B casks.

^e For purposes of analysis only, it was assumed that GTCC waste would be shipped to Yucca Mountain. Several DOE sites and generic commercial locations are being evaluated in the GTCC EIS as potential disposal locations.

^f For purposes of analysis only, it was assumed that transuranic waste would be shipped to WIPP.

^g Hazardous waste would be disposed of at landfills within 160 kilometers (100 miles) of the site.

^h This includes construction/demolition debris or other wastes that go to local landfills within about 160 kilometers (100 miles) of the site.

ⁱ Under the No Action Alternative, waste is generated both annually and periodically. Here, for the purposes of comparisons to other alternatives, waste shipments are given for monitoring and maintenance activities over a 25-year period.

^j DOE waste would go to the Nevada Test Site or EnergySolutions or other appropriate commercial facility. Commercial waste would only go to EnergySolutions or other appropriate commercial facility because commercial wastes cannot be disposed of in a DOE facility.

Note: The values given in this table are for truck shipments. Rail shipments are assumed to be one-half of the number of truck shipments because each rail shipment is assumed to carry twice as much waste as a truck shipment.

**Table J-8 Risks of Transporting Radioactive Waste Under Each Alternative ^a
(using Barnwell as a disposal site for commercial Class B and C wastes)**

Disposal Option	Transport Mode	Number of Shipments	One-way Kilometers Traveled (million)	Incident-Free				Accident	
				Crew		Population		Radiological Risk ^b	Non-radiological Risk ^b
				Dose (person-rem)	Risk ^b	Dose (person-rem)	Risk ^b		
Sitewide Removal Alternative									
DOE/Commercial	Truck	105,626	360.7	1,602.9	0.96	348.8	0.21	5.6×10^{-4}	7.5
	Rail	52,817	189.4	58.3	0.035	92.5	0.056	5.1×10^{-4}	29.6
Commercial	Truck	105,777	345.0	1,545.6	0.93	318.3	0.191	6.9×10^{-4}	7.2
	Rail	52,891	180.9	55.1	0.033	91.1	0.055	6.3×10^{-4}	28.3
Sitewide Close-In-Place Alternative									
DOE/Commercial	Truck	1,225	4.4	46.6	0.028	11.0	0.0066	4.4×10^{-7}	0.09
	Rail	615	2.3	1.9	0.0011	2.9	0.0017	3.7×10^{-7}	0.36
Commercial	Truck	1,225	3.9	35.0	0.021	8.9	0.0053	3.8×10^{-7}	0.08
	Rail	615	2.1	1.5	0.0009	2.8	0.0017	3.6×10^{-7}	0.32
Phased Decisionmaking Alternative – Phase 1									
DOE/Commercial	Truck	12,467	48.8	273.7	0.16	71.4	0.043	1.3×10^{-5}	1.0
	Rail	6,237	25.7	10.6	0.0064	16.3	0.0098	8.4×10^{-6}	4.0
Commercial	Truck	12,609	40.7	265.4	0.16	51.1	0.031	1.4×10^{-4}	0.9
	Rail	6,306	21.3	9.0	0.0054	15.3	0.0092	1.3×10^{-4}	3.3
No Action Alternative ^c									
DOE/Commercial	Truck	739	2.91	46.9	0.028	14.7	0.0088	4.3×10^{-7}	0.06
	Rail	371	1.54	2.0	0.0012	3.2	0.0019	3.1×10^{-7}	0.24
Commercial	Truck	739	2.4	38.9	0.023	12.1	0.0073	3.6×10^{-7}	0.05
	Rail	370	1.3	1.7	0.001	3.2	0.0019	3.0×10^{-7}	0.20

^a For purposes of analysis only, the Greater-Than-Class C and transuranic wastes are assumed to be transported to Yucca Mountain and WIPP, respectively. A disposal facility for Greater-Than-Class C low-level radioactive waste and potential non-defense transuranic waste will be determined through the *Disposal of Greater-Than-Class C Low-Level Radioactive Waste Environmental Impact Statement* (DOE/EIS-0375).

^b Risk is expressed in terms of LCFs, except for the nonradiological risk, where it refers to the number of traffic accident fatalities.

^c Under the No Action Alternative, for the purposes of comparisons to other alternatives, transportation impacts are provided for monitoring and maintenance activities over a 25-year period.

Note: To convert kilometers to miles, multiply by 0.62137.

**Table J-9 Risks of Transporting Radioactive Waste Under Each Alternative ^a
(using a Western U.S. disposal site for commercial Class B and Class C wastes)**

Disposal Option	Transport Mode	Number of Shipments	One-way Kilometers Traveled (million)	Incident-Free				Accident	
				Crew		Population		Radiological Risk ^b	Non-radiological Risk ^b
				Dose (person-rem)	Risk ^b	Dose (person-rem)	Risk ^b		
Sitewide Removal Alternative									
DOE/Commercial	Truck	105,626	362.9	2,098.9	1.26	375.6	0.225	8.6×10^{-4}	7.54
	Rail	52,817	190.4	65.3	0.039	95.5	0.057	7.4×10^{-4}	29.78
Commercial	Truck	105,777	348.1	2,219.7	1.33	357.3	0.21	1.1×10^{-3}	7.2
	Rail	52,891	182.4	65.1	0.039	95.5	0.057	9.4×10^{-4}	28.5
Sitewide Close-In-Place Alternative									
DOE/Commercial	Truck	1,225	4.4	50.6	0.030	11.5	0.0069	4.4×10^{-7}	0.09
	Rail	615	2.3	1.97	0.0012	2.9	0.0018	3.8×10^{-7}	0.37
Commercial	Truck	1,225	4.0	47.6	0.029	10.4	0.0062	4.0×10^{-7}	0.08
	Rail	615	2.1	1.5	0.0009	2.8	0.0017	3.8×10^{-7}	0.33
Phased Decisionmaking Alternative – Phase 1									
DOE/Commercial	Truck	12,467	48.8	273.7	0.16	71.4	0.043	1.3×10^{-5}	1.0
	Rail	6,237	25.7	10.6	0.0063	16.3	0.0098	8.4×10^{-6}	4.0
Commercial	Truck	12,609	41.4	402.7	0.24	58.9	0.035	2.2×10^{-4}	0.9
	Rail	6,306	21.6	11.0	0.0066	16.2	0.0097	1.9×10^{-4}	3.4
No Action Alternative ^c									
DOE/Commercial	Truck	739	2.9	46.9	0.028	14.7	0.0088	4.3×10^{-7}	0.06
	Rail	371	1.5	2.0	0.00119	3.2	0.0019	3.1×10^{-7}	0.2
Commercial	Truck	739	2.4	38.9	0.023	12.1	0.0073	3.6×10^{-7}	0.05
	Rail	370	1.3	1.7	0.001	3.2	0.0019	3.0×10^{-7}	0.2

NTS = Nevada Test Site.

^a For purposes of analysis only, the Greater-Than-Class C and transuranic wastes are assumed to be transported to Yucca Mountain and WIPP, respectively. A disposal facility for Greater-Than-Class C low-level radioactive waste and potential non-defense transuranic waste will be determined through the *Disposal of Greater-Than-Class C Low-Level Radioactive Waste Environmental Impact Statement* (DOE/EIS-0375).

^b Risk is expressed in terms of LCFs, except for the nonradiological risk, where it refers to the number of traffic accident fatalities. Accident dose-risk can be calculated by dividing the risk values by 0.0006 (DOE 2003a).

^c Under the No Action Alternative, for the purposes of comparisons to other alternatives, transportation impacts are provided for monitoring and maintenance activities over a 25-year period.

Note: To convert kilometers to miles, multiply by 0.62137.

The values presented in Tables J-8 and J-9 show that the total radiological risks (the product of consequence and frequency) are very small under all alternatives. It should be noted that the maximum annual dose to a transportation worker would be limited to 100 millirem per year, unless the individual is a trained radiation worker who would have an administrative annual dose limit of 2 rem (DOE 1999).⁶ The potential for a trained radiation worker to develop a latent fatal cancer from the maximum annual exposure is 0.0012. Therefore, no individual transportation worker would be expected to develop a latent fatal cancer from exposures during the activities under all alternatives.

⁶ A DOE transportation contractor may choose another dose limit for workers, but this dose is limited to 5 rem per year per 10 CFR 20.1201.

Nonradiological accident risks (the potential for fatalities as a direct result of traffic accidents) present the greatest risks. Considering that the transportation activities analyzed in this EIS would occur over a 10- to 62-year period and the average number of traffic fatalities in the United States is about 40,000 per year (NHTSA 2006), the traffic fatality risk under all alternatives would be very small.

The risks to various exposed individuals under incident-free transportation conditions have been estimated for hypothetical exposure scenarios identified in Section J.5.3. The estimated doses to workers and the public are presented in **Table J-10**. Doses are presented on a per-event basis (person-rem per event, per exposure, or per shipment), as it is generally unlikely that the same person would be exposed to multiple events. For those individuals that could have multiple exposures, the cumulative dose could be calculated. The maximum dose to a crew member is based on the same individual being responsible for driving every shipment for the duration of the campaign. Note that the potential exists for larger individual exposures under one-time events of a longer duration. For example, the dose to a person stuck in traffic next to a shipment of Class B or Class C wastes for 30 minutes is calculated to be 0.026 rem (26 millirem). This is generally considered a one-time event for that individual. This individual may encounter another exposure of a similar or longer duration in his/her lifetime.

Table J-10 Estimated Dose to Maximally Exposed Individuals Under Incident-Free Transportation Conditions

<i>Receptor</i>	<i>Dose to Maximally Exposed Individual</i>
Workers	
Crew member (truck/rail driver)	2 rem per year ^a
Inspector	0.062 rem per event per hour of inspection
Rail yard worker	0.018 rem per event
Public	
Resident (along the rail route)	1.9×10^{-6} rem per event
Resident (along the truck route)	9.3×10^{-7} rem per event
Person in traffic congestion	0.026 rem per event per one-half hour stop
Resident near the rail yard during classification	2.5×10^{-4} rem per event
Person at a rest stop/gas station	2.4×10^{-4} rem per event per hour of stop
Gas station attendant	7.9×10^{-4} rem per event

^a Maximum administrative dose limit per year for a trained radiation worker (truck/rail crew member).

A member of the public residing along the route would likely receive multiple exposures from passing shipments. The cumulative dose to this resident can be calculated assuming all shipments pass his or her home. The cumulative dose is calculated assuming that the resident is present for every shipment and is unshielded at a distance of 30 meters (about 98 feet) from the route. Therefore, the cumulative dose depends on the number of shipments passing a particular point and is independent of the actual route being considered. If one assumes the maximum resident dose provided in Table J-10 for all waste transport types, then the maximum dose to this resident, if all the materials were to be shipped via this route, would be less than 100 millirem. This dose corresponds to that for truck (or rail) shipments under the Sitewide Removal Alternative, which has an estimated number of shipments of about 105,780 (or 52,890) over about 60 years. This dose translates to less than 2 millirem per year, with a risk of developing a latent fatal cancer of less than 6×10^{-5} over the 60-year duration of transport.

The accident risk assessment and the impacts shown in Tables J-8 and J-9 take into account the entire spectrum of potential accidents, from the fender bender to extremely severe. To provide additional insight into the severity of accidents in terms of the potential dose to a MEI and the public, an accident consequence assessment has been performed for a maximum reasonably foreseeable hypothetical transportation accident

with a likelihood of occurrence greater than 1 in 10 million per year. The results, presented in Tables J-8 and J-9, include all conceivable accidents, irrespective of their likelihood.

The following assumptions were used to estimate the consequences of maximum reasonably foreseeable offsite transportation accidents:

- The accident is the most severe with the highest release fraction; high-impact and high-temperature fire accident (highest severity category).
- The individual is 100 meters (330 feet) downwind from a ground release accident.
- The individual is exposed to airborne contamination for 2 hours and ground contamination for 24 hours with no interdiction or cleanup. A stable weather condition (Pasquill Stability Class F) with a wind speed of 1 meter per second (2.2 miles per hour) is considered.
- The population is assumed to be a uniform density to a radius 80 kilometers (50 miles), and exposed to the entire plume passage and 7 days of ground exposure without interdiction and cleanup. A neutral weather condition (Pasquill Stability Class D) with a wind speed of 4 meters per second (8.8 miles per hour) is considered. Since the consequence is proportional to the population density, the accident is assumed to occur in an urban⁷ area with the highest density (see Table J-1).
- The number of containers involved in the accident is listed in Table J-2. When multiple Type B or shielded Type A shipping casks are transported in a shipment, a single cask is assumed to have failed in the accident. It is unlikely that a severe accident would breach multiple casks.

Table J-11 provides the estimated dose and risk to an individual and population from a maximum foreseeable truck or rail transportation accident with the highest consequences under each alternative and disposal option. Except for the No Action Alternative and Sitewide Close-In-Place Alternative, the highest consequences for the maximum foreseeable accident are from accidents involving Class B/C waste in a high integrity container in a severe impact in conjunction with a long fire duration. The consequences are driven by the container structural materials, i.e., a poly-hydrocarbon polymer, which in a fire would lead to high airborne releases. Under the No Action and Sitewide Close-In-Place Alternatives, the highest consequences for the maximum foreseeable accident are those involving Class A wastes in boxes.

J.8 Impact of Construction and Operational Material Transport

This section evaluates the impacts of transporting construction/demolition debris and hazardous wastes as well as materials required to construct new facilities, barriers, and erosion controls. The construction materials considered are concrete, cement, sand/gravel/dirt, asphalt, geomembrane fabric, steel, and piping, etc. The impacts were evaluated based on the number of truck shipments required for each of the materials and the distances from their point of origin to the WNYNSC Site. The origins of these materials were assumed to be at an average distance of 160 kilometers (100 miles) from the site. The truck kilometers for all material shipments under each alternative were calculated by summing all of the activities from construction through closure (where applicable). The truck accident and fatality rates were assumed to be those that were provided earlier for the onsite and local area transports. **Table J-12** summarizes the impacts in terms of total number of kilometers, accidents, and fatalities for all alternatives. The results indicate that there are no large differences in the impacts among all alternatives. Under all alternatives, the expected potential traffic fatalities are very low.

⁷ If the likelihood of accident in an urban area is less than 1-in-10 million per year, then the accident is evaluated for a suburban area.

Table J-11 Estimated Dose to the Population and to Maximally Exposed Individuals Under Most Severe Accident Conditions^a

Main Disposal Option/ Transport Mode	Waste Material in the Accident With the Highest Consequences	Likelihood of the Accident (per year)	Population ^b		MEI ^c	
			Dose (person- rem)	Risk (LCF)	Dose (rem)	Risk (LCF)
Sitewide Removal Alternative						
DOE/Commercial (truck) ^d	Class B and Class C in HIC	6.7×10^{-7}	74.1	0.044	0.15	9.0×10^{-5}
DOE/Commercial (rail)	Class B and Class C in HIC	4.4×10^{-7}	1,186	0.71	0.30	1.8×10^{-4}
Commercial (truck) ^d	Class B and Class C in HIC	8.4×10^{-7}	74.1	0.044	0.15	9.0×10^{-5}
Commercial (rail)	Class B and Class C in HIC	5.8×10^{-7}	1,186	0.71	0.30	1.8×10^{-4}
Sitewide Close-In-Place Alternative						
DOE/Commercial (truck) ^d	Class A in Box	5.9×10^{-7}	0.020	1.2×10^{-5}	3.6×10^{-5}	2.2×10^{-8}
DOE/Commercial (rail) ^d	Class A in Box	1.1×10^{-7}	0.054	3.2×10^{-5}	7.2×10^{-5}	4.3×10^{-8}
Commercial (truck) ^d	Class A in Box	6.6×10^{-7}	0.020	1.2×10^{-5}	3.6×10^{-5}	2.2×10^{-8}
Commercial (rail) ^d	Class A in Box	1.3×10^{-7}	0.054	3.2×10^{-5}	7.2×10^{-5}	4.3×10^{-8}
Phased Decisionmaking Alternative						
DOE/Commercial (truck) ^d	Class B and Class C in Box	2.0×10^{-7}	6.13	0.0037	0.011	6.6×10^{-6}
DOE/Commercial (rail) ^{d,e}	Class B and Class C in Box	3.5×10^{-8}	16.4	0.0098	0.022	1.3×10^{-5}
Commercial (truck)	Class B and Class C in HIC	1.0×10^{-7}	593	0.356	0.15	9.0×10^{-5}
Commercial (rail)	Class B and Class C in HIC	6.6×10^{-7}	1,186	0.71	0.30	1.8×10^{-4}
No Action Alternative						
DOE/Commercial (truck) ^d	Class A in Box	4.8×10^{-7}	0.020	1.2×10^{-5}	3.6×10^{-5}	2.2×10^{-8}
DOE/Commercial (rail) ^{d,e}	Class A in Box	8.4×10^{-8}	0.054	3.2×10^{-5}	7.2×10^{-5}	4.3×10^{-8}
Commercial (truck) ^d	Class A in Box	4.2×10^{-7}	0.020	1.2×10^{-5}	3.6×10^{-5}	2.2×10^{-8}
Commercial (rail) ^{d,e}	Class A in Box	8.3×10^{-8}	0.054	3.2×10^{-5}	7.2×10^{-5}	4.3×10^{-8}

- HIC = high-integrity container, LCF = latent cancer fatality, MEI = maximally exposed individual, NTS = Nevada Test Site.
- ^a The frequencies are based on using a Western U.S. disposal site for commercial Class B and Class C wastes. If Barnwell is used, the frequencies would be smaller.
- ^b Population extends at a uniform density to a radius of 80 kilometers (50 miles). The weather condition was assumed to be Pasquill Stability Class D with a wind speed of 4 meters per second (8.8 miles per hour). Unless otherwise noted, the population doses and risks are presented for an urban area on the transportation route.
- ^c The MEI is assumed to be 100 meters (300 feet) downwind from the accident and exposed to the entire plume of the radioactive release. The weather condition is assumed to be Pasquill Stability Class F with a wind speed of 1 meter per second (2.2 miles per hour).
- ^d Population dose and risk are for a suburban area along the route. The probability of a maximum foreseeable accident in an urban area along the transportation route is less than 10^{-7} per year.
- ^e This accident would have a likelihood of less than 1 in 10 million. It is only provided for completeness.

Table J-12 Estimated Impacts of Construction and Operational Material Transport

Alternative	Total Distance Traveled (kilometers)	Number of Accidents	Number of Fatalities
Sitewide Removal	75.98×10^6	26.21	0.94
Sitewide Close-In-Place	79.14×10^6	27.30	0.98
Phased Decisionmaking	7.95×10^6	2.74	0.10
No Action	0.018×10^6	0.006	0.0004

Note: To convert from kilometers to miles, multiply by 0.6214.

J.9 Conclusions

Based on the results presented in the previous section, the following conclusions have been reached (see Tables J-6, and J-9 through J-11):

- It is unlikely that the transportation of radioactive waste would cause an additional fatality as a result of radiation, either from incident-free operation or postulated transportation accidents.
- The highest risk to the public would be under the Sitewide Removal Alternative, NTS disposal site option, where about 105,780 truck or 52,890 rail shipments of radioactive wastes would be transported to Hanford and other commercial (i.e., EnergySolutions and a Western U.S. site) and Government (i.e., assumed, for analysis only, to WIPP and Yucca Mountain) disposal sites.
- The lowest risk to the public would be under the Sitewide Close-In-Place Alternative, commercial disposal site option, where about 1,230 truck or 615 rail shipments of radioactive wastes would be transported to commercial (i.e., EnergySolutions and a Western U.S. site) disposal sites.
- The nonradiological accident risks (the potential for fatalities as a direct result of traffic or rail accidents) present the greatest risks. The maximum risks would occur under the Sitewide Removal Alternative using rail shipments. Considering that the transportation activities would occur over a period of time from about 10 to 60 years and that the average number of traffic fatalities in the United States is about 40,000 per year, the traffic fatality risks under all alternatives are very small.

J.10 Long-term Impacts of Transportation

The *Yucca Mountain EIS* (DOE 2002a, 2008) analyzed the cumulative impacts of the transportation of radioactive material, consisting of impacts of historical shipments of radioactive waste and spent nuclear fuel, reasonably foreseeable actions that include transportation of radioactive material, and general radioactive material transportation that is not related to a particular action. The collective dose to the general population and workers was the measure used to quantify cumulative transportation impacts. This measure of impact was chosen because it may be directly related to the LCFs using a cancer risk coefficient. **Table J-13** provides a summary of the total worker and general population collective doses from various transportation activities. The table shows that the impacts of this program are quite small compared with the overall transportation impacts. The total collective worker dose from all types of shipments (historical, the alternatives, reasonably foreseeable actions, and general transportation) was estimated to be about 386,500 person-rem (232 LCFs) for the period 1943 through 2073 (131 years). The total general population collective dose was also estimated to be about 350,800 person-rem (210 LCFs). The majority of the collective dose for workers and the general population was due to the general transportation of radioactive material. Examples of these activities are shipments of radiopharmaceuticals to nuclear medicine laboratories and shipments of commercial low-level waste to commercial disposal facilities. The total number of LCFs (among the workers and the general population) estimated to result from radioactive material transportation over the period between 1943 and 2073 is about 440, or an average of about 4 LCFs per year. Over this same period (131 years), approximately 73 million people would die from cancer, based on the National Center for Health Statistics data. The average annual number of cancer deaths in the United States is about 554,000, with less than 1 percent fluctuation in the number of cancer fatalities in any given year (CDC 2007). The transportation-related LCFs would be 0.0006 percent of the total number of LCFs; therefore, it is indistinguishable from the natural fluctuation in the total annual death rate from cancer.

Table J-13 Cumulative Transportation-related Radiological Collective Doses and Latent Cancer Fatalities (1943 to 2047)

<i>Category</i>	<i>Collective Worker Dose (person-rem)</i>	<i>Collective General Population Dose (person-rem)</i>
Transportation Impacts in this EIS	2,220 ^a	376 ^a
Other Nuclear Material Shipments		
Historical	330	230
Reasonably Foreseeable Actions	28,000	49,000
General Radioactive Material Transport (1943 to 2073)	350,000	300,000
<i>Yucca Mountain EIS</i> ^b (maximum transport) (up to 2073)	5,900	1,200
Total Collective Dose ^c (up to 2073)	386,500	350,800
Total Latent Cancer Fatalities ^d	232	210

^a Maximum values from Tables J-9.

^b Impacts for the Proposed Action in the *Draft Yucca Mountain Supplemental EIS* (DOE 2008 Table 8-14). [Similar impacts in the *Yucca Mountain EIS* (DOE 2002a) were 4,600 and 1,600 person-rem for workers and population, respectively.] If DOE decides to expand the program to include all potential high-level and Greater-Than-Class C wastes and spent nuclear fuel (e.g., implement inventory Module 2), then the worker and public doses would be about 20,000 and 3,500 person-rem, respectively.

^c The values are rounded to the nearest hundred.

^d Total latent cancer fatalities are calculated assuming 0.0006 latent cancer fatalities per rem of exposure.

Sources: DOE 2002a, 2008.

J.11 Uncertainty and Conservatism in Estimated Impacts

The sequence of analyses performed to generate the estimates of radiological risk for transportation includes (1) determination of the inventory and characteristics, (2) estimation of shipment requirements, (3) determination of route characteristics, (4) calculation of radiation doses to exposed individuals (including estimating of environmental transport and uptake of radionuclides), and (5) estimation of health effects. Uncertainties are associated with each of these steps. Uncertainties exist in the way that the physical systems being analyzed are represented by the computational models; in the data required to exercise the models (due to measurement errors, sampling errors, natural variability, or unknowns caused simply by the future nature of the actions being analyzed); and in the calculations themselves (e.g., approximate algorithms used by the computers).

In principle, one can estimate the uncertainty associated with each input or computational source and predict the resultant uncertainty in each set of calculations. Thus, one can propagate the uncertainties from one set of calculations to the next and estimate the uncertainty in the final, or absolute, result; however, conducting such a full-scale quantitative uncertainty analysis is often impractical and sometimes impossible, especially for actions to be initiated at an unspecified time in the future. Instead, the risk analysis is designed to ensure, through uniform and judicious selection of scenarios, models, and input parameters, that relative comparisons of risk among the various alternatives are meaningful. In the transportation risk assessment, this design is accomplished by uniformly applying common input parameters and assumptions to each alternative. Therefore, although considerable uncertainty is inherent in the absolute magnitude of the transportation risk for each alternative, much less uncertainty is associated with the relative differences among the alternatives in a given measure of risk.

In the following sections, areas of uncertainty are discussed for the assessment steps enumerated above. Special emphasis is placed on identifying whether the uncertainties affect relative or absolute measures of risk. The reality and conservatism of the assumptions are addressed. Where practical, the parameters that most significantly affect the risk assessment results are identified.

J.11.1 Uncertainties in Material Inventory and Characterization

The inventories and the physical and radiological characteristics are important input parameters to the transportation risk assessment. The potential number of shipments for all alternatives is primarily based on the projected dimensions of package contents, the strength of the radiation field, the heat that must be dissipated, and assumptions concerning shipment capacities. The physical and radiological characteristics are important in determining the material released during accidents and the subsequent doses to exposed individuals through multiple environmental exposure pathways.

Uncertainties in the inventory and characterization are reflected in the transportation risk results. If the inventory is overestimated (or underestimated), the resulting transportation risk estimates are also overestimated (or underestimated) by roughly the same factor. However, the same inventory estimates are used to analyze the transportation impacts of each of the alternatives. Therefore, for comparative purposes, the observed differences in transportation risks among the alternatives, as given in Tables J-8 and J-9, are believed to represent unbiased, reasonably accurate estimates from current information in terms of relative risk comparisons.

J.11.2 Uncertainties in Containers, Shipment Capacities, and Number of Shipments

The transportation required for each alternative is based in part on assumptions concerning the packaging characteristics and shipment capacities for commercial trucks. Representative shipment capacities have been defined for assessment purposes based on probable future shipment capacities. In reality, the actual shipment capacities may differ from the predicted capacities such that the projected number of shipments and, consequently, the total transportation risk, would change. However, although the predicted transportation risks would increase or decrease accordingly, the relative differences in risks among alternatives would remain about the same.

J.11.3 Uncertainties in Route Determination

Analyzed routes have been determined between all origin and destination sites considered in the EIS. The routes have been determined to be consistent with current guidelines, regulations, and practices, but may not be the actual routes that would be used in the future. In reality, the actual routes could differ from the representative ones with regard to distances and total population along the routes. Moreover, because materials could be transported over an extended time starting at some time in the future, the highway infrastructure and the demographics along routes could change. These effects have not been accounted for in the transportation assessment; however, it is not anticipated that these changes would significantly affect relative comparisons of risk among the alternatives considered in the EIS. Specific routes cannot be identified in advance because the routes are classified to protect national security interests.

J.11.4 Uncertainties in the Calculation of Radiation Doses

The models used to calculate radiation doses from transportation activities introduce a further uncertainty in the risk assessment process. Estimating the accuracy or absolute uncertainty of the risk assessment results is generally difficult. The accuracy of the calculated results is closely related to the limitations of the computational models and to the uncertainties in each of the input parameters that the model requires. The single greatest limitation facing users of RADTRAN, or any computer code of this type, is the scarcity of data for certain input parameters. Populations (off-link and on-link) along the transportation routes, shipment surface dose rates, and individuals residing near the routes are the most uncertain data in dose calculations. In preparing these data, one makes assumptions that the off-link population is uniformly distributed; the on-link population is proportional to the traffic density, with an assumed occupancy of two persons per car; the shipment surface dose rate is the maximum allowed dose rate; and a potential exists for an individual to be

residing at the edge of the highway. It is clear that not all assumptions are accurate. For example, the off-link population is mostly heterogeneous, and the on-link traffic density varies widely within a geographic zone (i.e., urban, suburban, or rural). Finally, added to this complexity are the assumptions regarding the expected distance between the public and the shipment at a traffic stop, rest stop, or traffic jam and the afforded shielding.

Uncertainties associated with the computational models are reduced by using state-of-the-art computer codes that have undergone extensive review. Because many uncertainties are recognized but difficult to quantify, assumptions are made at each step of the risk assessment process intended to produce conservative results (i.e., overestimate the calculated dose and radiological risk). Because parameters and assumptions are applied consistently to all alternatives, this model bias is not expected to affect the meaningfulness of relative comparisons of risk; however, the results may not represent risks in an absolute sense.

J.12 References

CDC (Center for Disease Control), 2007, Total Number of Deaths for 113 Selected Causes, 1999-2004, National Center for Health Studies, August.

DOE (U.S. Department of Energy), 1994, *DOE Handbook – Airborne Release Fractions/Rates and Respirable Fractions for Nonreactor Nuclear Facility*, DOE-HDBK-3010-94, (Change Notice No. 1, March 2000), Washington, DC, December.

DOE (U.S. Department of Energy), 1996, *Final Environmental Impact Statement on a Proposed Nuclear Weapons Nonproliferation Policy Concerning Foreign Research Reactor Spent Nuclear Fuel*, DOE/EIS-0218, Office of Environmental Management, Washington, DC, February.

DOE (U.S. Department of Energy), 1997, *Waste Isolation Pilot Plant Disposal Phase Final Supplemental Environmental Impact Statement*, DOE/EIS-0026-S-2, Carlsbad Area Office, Carlsbad, New Mexico, September.

DOE (U.S. Department of Energy), 1999, DOE Standard DOE-STD-1098-99, *Radiological Control*, Washington, DC, July.

DOE (U.S. Department of Energy), 2002a, *Final Environmental Impact Statement for a Geological Repository for the Disposal of Spent Nuclear Fuel and High-Level Radioactive Waste at Yucca Mountain, Nye County, Nevada*, DOE/EIS-0250, Office of Civilian Radioactive Waste Management, Washington, DC, February.

DOE (U.S. Department of Energy), 2002b, *A Resource Handbook on DOE Transportation Risk Assessment*, DOE/EM/NTP/HB-01, Office of Environmental Management, National Transportation Program, Albuquerque, New Mexico (accessed at <http://www.ntp.doe.gov/readnews21.shtml>), July.

DOE (U.S. Department of Energy), 2003a, *Recommended Radiation Risk Factors Updated*, National Environmental Policy Act Lessons Learned, Office of NEPA Policy and Compliance, Quarterly Report, Issue No. 34, Washington, DC, March 3.

DOE (U.S. Department of Energy), 2003b, *West Valley Demonstration Project Waste Management Environmental Impact Statement*, Final, DOE/EIS-0337F, West Valley Area Office, West Valley, New York, December.

DOE (U.S. Department of Energy), 2008, *Final Supplemental Environmental Impact Statement for a Geologic Repository for the Disposal of Spent Nuclear Fuel and High-Level Radioactive Waste at Yucca Mountain, Nye County, Nevada – Nevada Rail Transportation Corridor* (DOE/EIS-025F-S2), and *Final Environmental Impact Statement for a Rail Alignment for the Construction and Operation of a Railroad in Nevada to a Geologic Repository at Yucca Mountain, Nye County, Nevada* (DOE/EIS-0369), Office of Civilian Radioactive Waste Management, Las Vegas, Nevada, June.

DOT (U.S. Department of Transportation), 1998, *Radioactive Material Regulations Review*, RAMREG-001-98, Research and Special Programs Administration.

FHWA (Federal Highway Administration), 2003, *Comprehensive Truck Size and Weight Study – Volume I, Executive Summary* (accessed at <http://www.fhwa.dot.gov/reports/twstudy/EXECSUM4.htm>), May 19.

Grove (Grove Engineering), 2003, *MicroShield Version 6 User's Manual*, Rockville, Maryland, March.

Johnson, P. E., and R. D. Michelhaugh, 2003, *Transportation Routing Analysis Geographic Information System (TRAGIS) –User’s Manual*, ORNL/NTRC-006, Rev. 0, U.S. Department of Energy, Oak Ridge National Laboratory, Oak Ridge, Tennessee (accessed at <http://apps.ntp.doe.gov/tragis/tragis.htm>) June.

Neuhauser, S. J., F. L. Kanipe, and R. R. Weiner, 2000, *RADTRAN 5 Technical Manual*, Sandia National Laboratories, Albuquerque, New Mexico (accessed at http://ttd.sandia.gov/risk/doc_list.htm), May.

Neuhauser, S. J., and F. L. Kanipe, 2003, *RADTRAN 5 User Guide*, revised by R. F. Weiner, SAND2003-2354, Sandia National Laboratories, Albuquerque, New Mexico (accessed at http://ttd.sandia.gov/risk/doc_list.htm), July.

NHTSA (National Highway Traffic Safety Administration), 2006, *Traffic Safety Facts 2004*, National Center for Statistics and Analysis, Washington, DC (accessed at <http://www-nrd.nhtsa.dot.gov/departments/nrd-30/ncsa/>), January.

NRC (U.S. Nuclear Regulatory Commission), 1977, *Final Environmental Impact Statement on the Transportation of Radioactive Materials by Air and Other Modes*, NUREG-0170, Washington, DC, December.

NRC (U.S. Nuclear Regulatory Commission), 1987, *Shipping Container Response to Severe Highway and Railway Accident Conditions*, NUREG/CR-4829 (UCID-20733), Washington, DC (accessed at <http://ttd.sandia.gov/nrc/docs.htm>), February.

NRC (U.S. Nuclear Regulatory Commission), 2000, *Reexamination of Spent Fuel Shipping Risk Estimates*, NUREG/CR-6672 (SAND2000-0234), Washington, DC (accessed at <http://ttd.sandia.gov/nrc/docs.htm>), March.

PNNL (Pacific Northwest National Laboratory), 1999, *Life-Cycle Cost and Risk Analysis of Alternative Configurations for Shipping Low-Level Radioactive Waste to the Nevada Test Facility*, DOE/CH/CRE-6-1999, Prepared for the Center for Risk Excellence, U.S. Department Energy, Chicago Operations Office, Richland, Washington, December.

Rao, R. K., E. L. Wilmot, and R. E. Luna, 1982, *Non-Radiological Impacts of Transporting Radioactive Material*, SAND81-1703, Sandia National Laboratories, Albuquerque, New Mexico, February.

Saricks, C., and M. M. Tompkins, 1999, *State-Level Accident Rates for Surface Freight Transportation: A Reexamination*, ANL/ESD/TM-150, Center for Transportation Research, Argonne National Laboratory, U.S. Department of Energy, Argonne, Illinois, April.

URS (URS Corporation), 2000, *Estimated Radionuclide Inventory of the NRC-Licensed Disposal Area at the West Valley Demonstration Project*, Orchard Park, New York, August.

URS (URS Corporation), 2002, *SDA Radiological Characterization Report*, Orchard Park New York, September 20.

WSMS (Washington Safety Management Solutions, LLC), 2008a, *Sitewide Removal Alternative Technical Report*, WSMS-WV-08-0002, West Valley, New York, November.

WSMS (Washington Safety Management Solutions, LLC), 2008b, *Sitewide Close-In-Place Alternative Technical Report*, WSMS-WV-08-0004, West Valley, New York, November.

WSMS (Washington Safety Management Solutions, LLC), 2008c, *Phased Decisionmaking Alternative Technical Report*, WSMS-WV-08-0005, West Valley, New York, November.

WSMS (Washington Safety Management Solutions, LLC), 2008d, *No Action Alternative Technical Report*, WSMS-WV-08-0003, West Valley, New York, November.

WVNS (West Valley Nuclear Services Company, Inc.), 2005, *West Valley Demonstration Project, Residual Radionuclide Inventory Estimate for the Waste Tank Farm*, Supplemental Report, West Valley Nuclear Services Company and Gemini Consulting Company, February 7.

Yuan, Y. C., S. Y. Chen, B. M. Biwer, and D. J. LePoire, 1995, *RISKIND - A Computer Program for Calculating Radiological Consequences and Health Risks from Transportation of Spent Nuclear Fuel*, ANL/EAD-1, Argonne National Laboratory, Argonne, Illinois, November.